

GALAXY-RS

1/10 SCALE RADIO CONTROL OFF-ROAD RACING BUGGY

READY TO ASSEMBLE RADIO CONTROL OFF-ROAD RACING CAR MODEL KIT/REQUIRES TWO CHANNEL, TWO SERVO CONTROL EQUIPMENT AND 7.2V RACING PACK NI-Cd BATTERY/INCLUDES MABUCHI RS540S POWERFUL MOTOR


With RS-540S High Speed Motor

1/10 Size, Electrically Powered, Radio Controlled Buggy Racing Model




MODELLING SKILLS HELPFUL IF UNDER 10 YEARS OF AGE.

DIFFERENTIAL GEAR DRIVE SYSTEM.
CHANGEABLE PINION GEAR RATIOS.
STRAIGHT RIBBED FRONT RUBBER TIRES.
WART PATTERN REAR RUBBER TIRES.
DURABLE REAR WING.
ADJUSTABLE 4 OIL FILLED SHOCK ABSORBERS.
ASSEMBLED SPEED CONTROLLER.

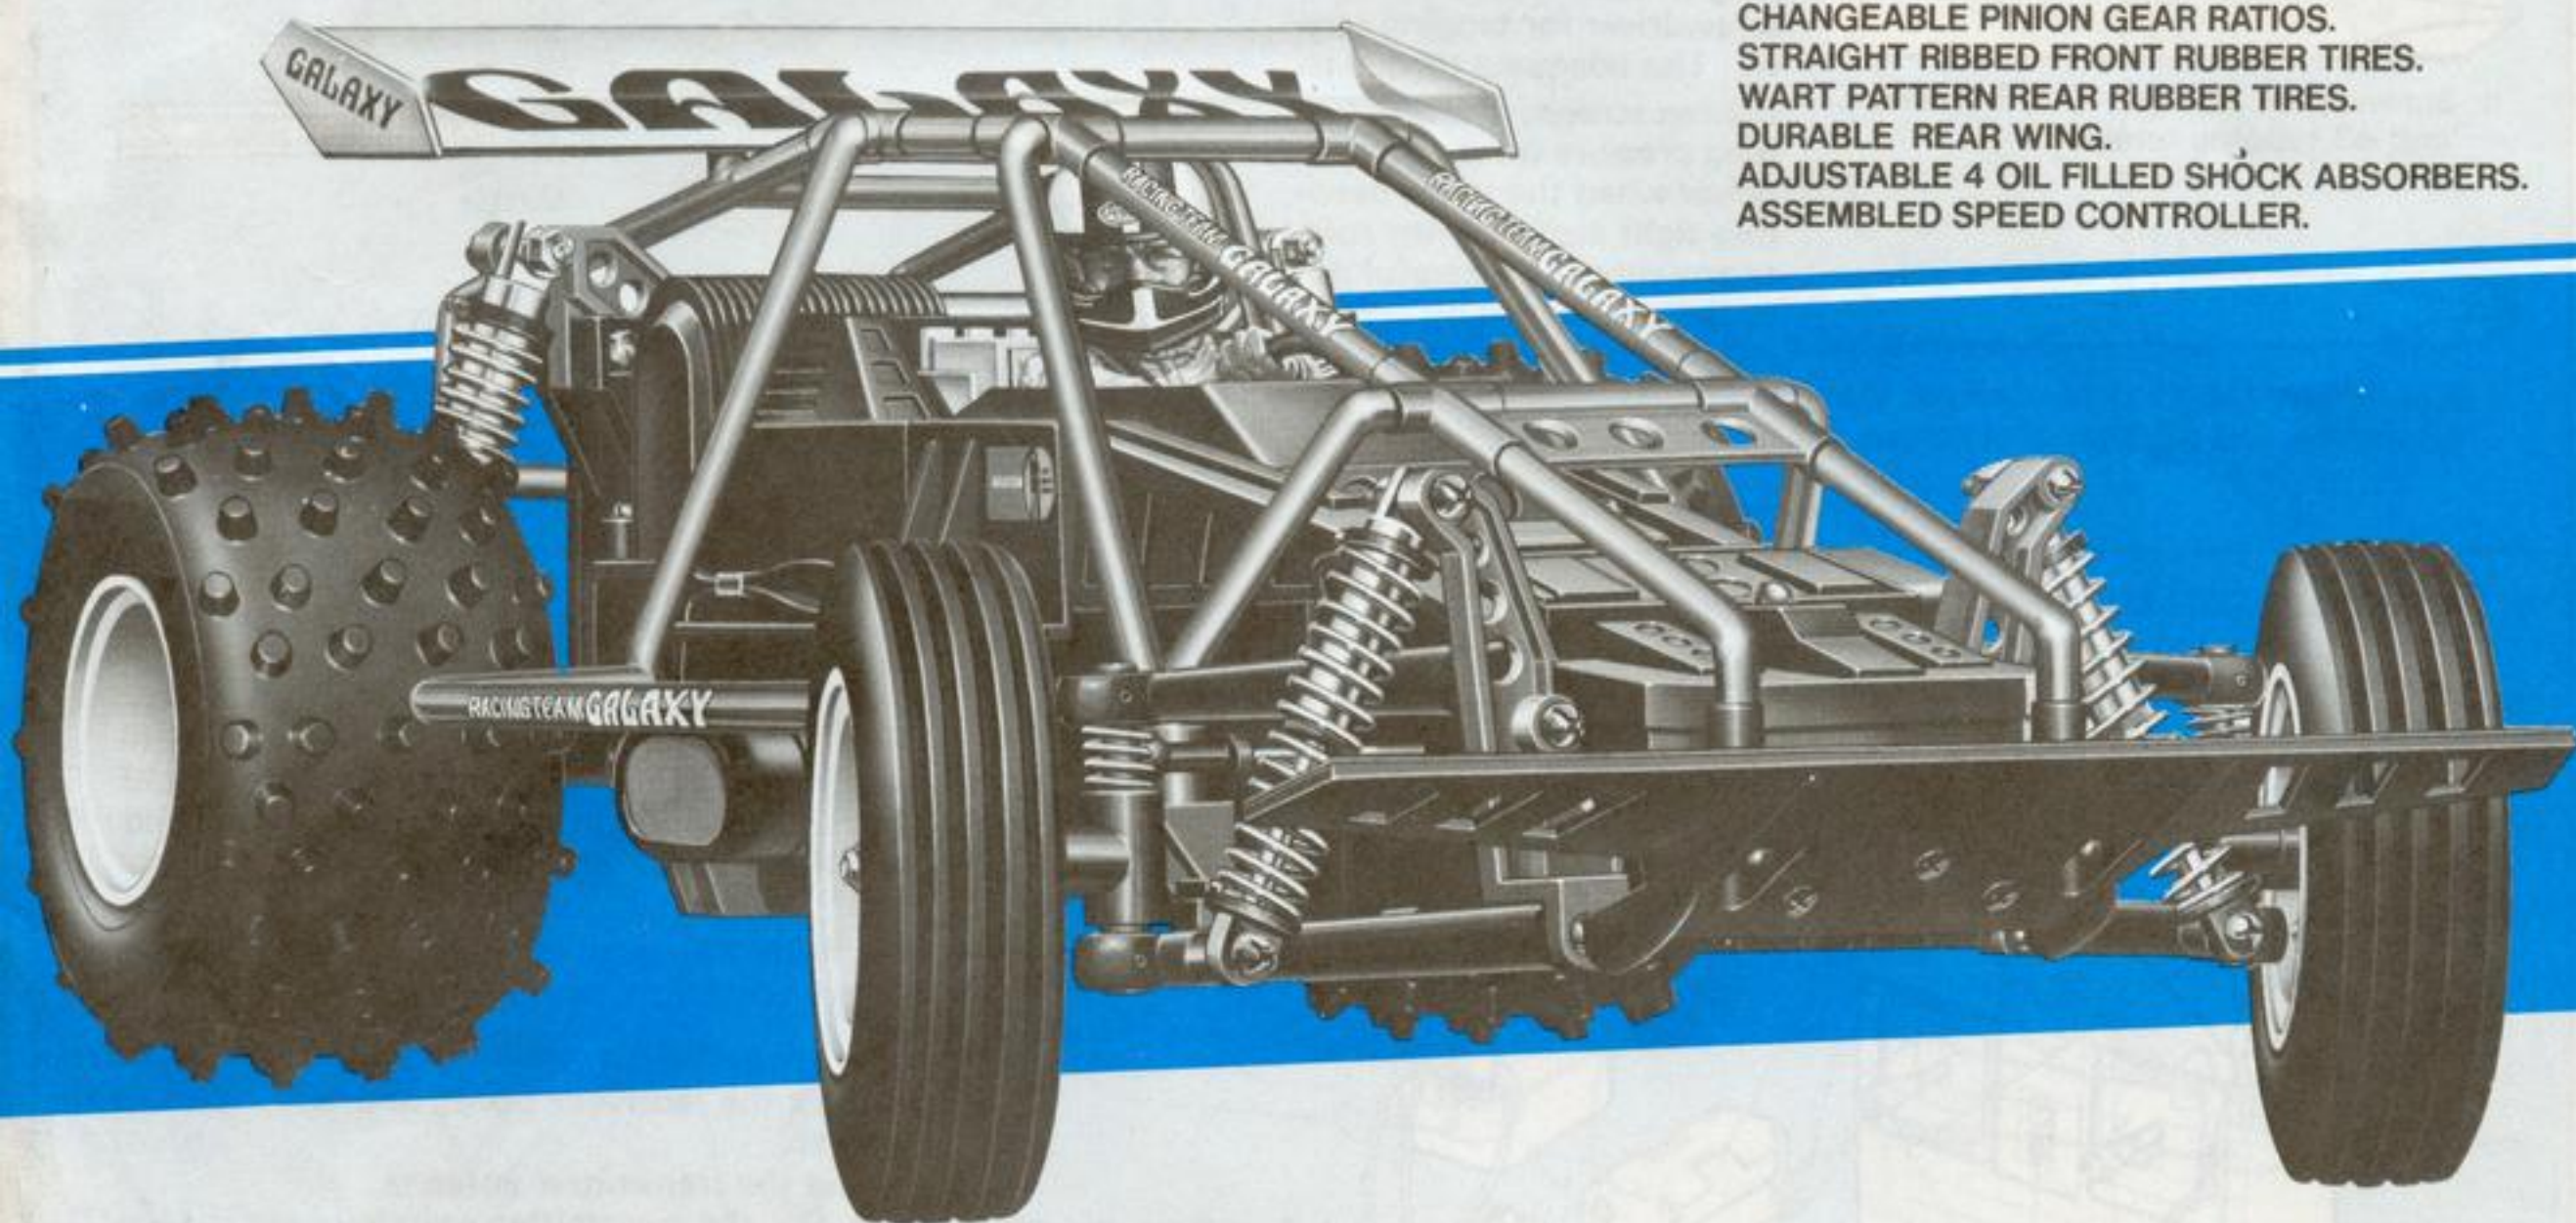


Tokyo Marui Plastic Model Co., Ltd.

HIGH PERFORMANCE R/C OFF-ROAD RACING CAR

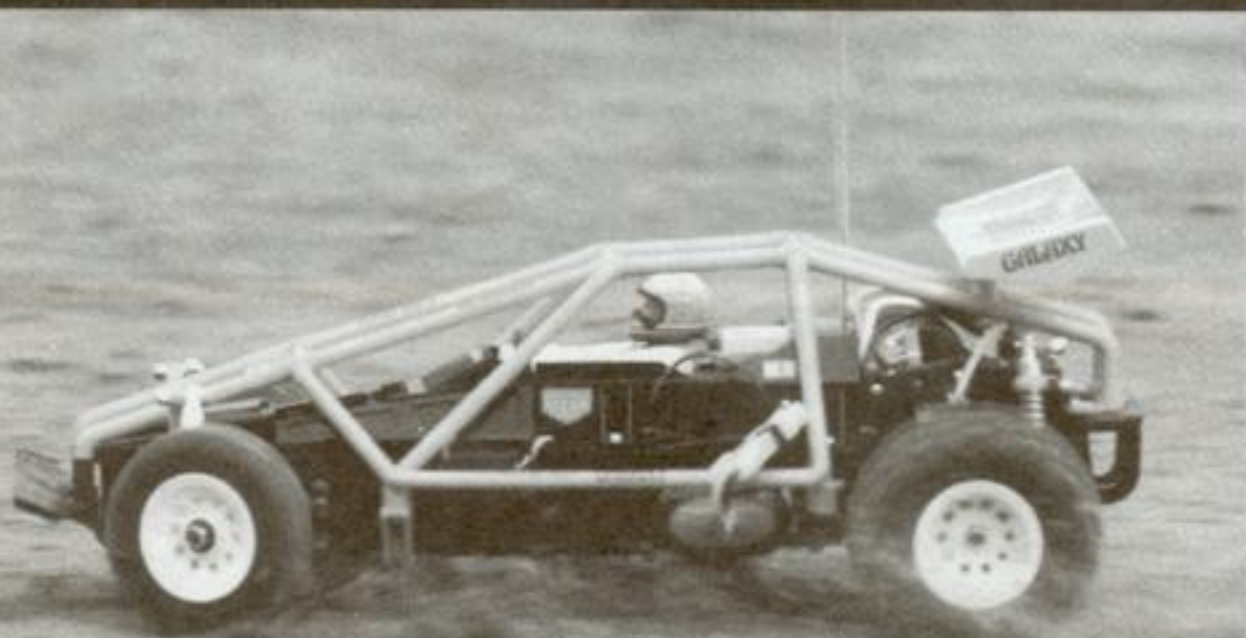

« Parts not included in the kit »

- 2-channel 2-servo proportional controller

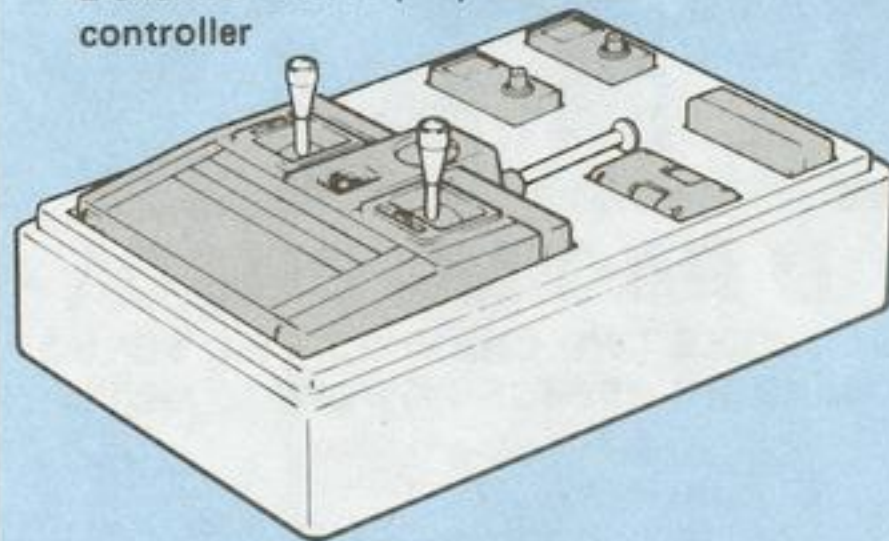

Majority of general type 2-channel unit is acceptable. Please be careful as some types are not suitable for this model. For those who are going to purchase a controller, the following models are recommended:
 FUTABA: ATTACK, MAGNUM
 K.O.: FX-II EX-II
 J.P.: BEAT 2
 SANWA: NEW DASH S




• Batteries for the proportional controller

Unplug the battery connector after use.


- Special battery charger

Marui 8.4V battery recharger (recharger must be purchased separately)

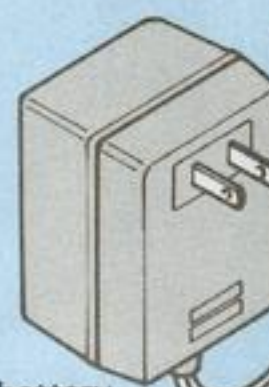

- Battery for driving:

A Nickel Cadmium battery of either a 6, 7.2, or 8.4V is needed.

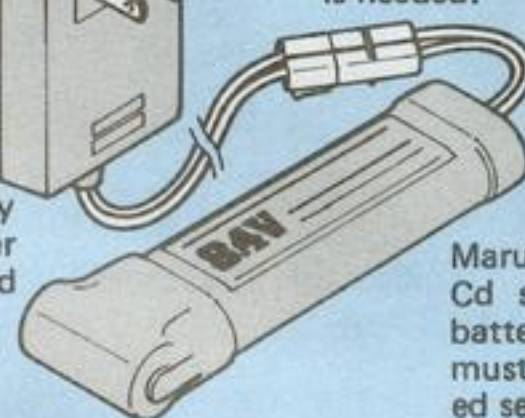


Marui 8.4 V Ni-Cd super racing battery (battery must be purchased separately)


6 to 8.4V Ni-Cd battery can be used to power the car. This battery can be recharged over 300 times. One type of recharger uses 100V household current to charge the battery in 4 to 16 hours. The other, a quick type recharger, uses a car's 12V cigarette lighter as a power source to charge the battery in 15 to 20 minutes.

« Tools required for assembly »

- ⊕ Only phillips type screwdrivers are shown in actual sizes.




+ Screwdriver (Large) for $\phi 3$ screws and $\phi 3$ tapping screws




+ Screwdriver (Middle) for damper shaft, $\phi 2$ screws, and $\phi 2.6$ tapping screws

This kit includes many tapping screws. Use the proper screwdriver for tapping screws. Use adequate torque to tighten screws. Release turning pressure on the screwdriver when the screw becomes tight and does not rotate any more. Be careful not to damage screws by applying too much torque.

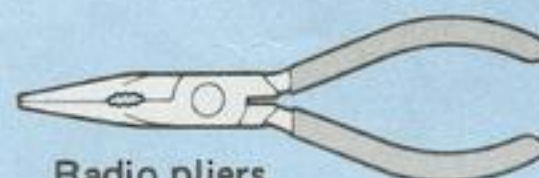


Radio pliers

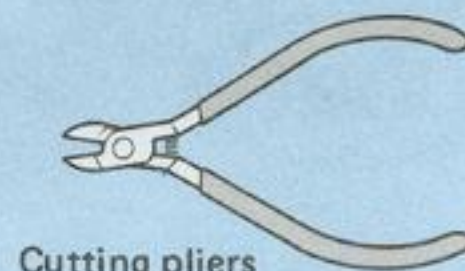

Cutting pliers



Scissors



Cutter



Plain screwdriver (Middle)




Small hammer

« Radio control unit »

This model uses a 2-channel 2-servo digital method radio control mechanism. Any maker's brand may be used. However, please note some types of controllers have more than 3 channels, and they cannot be utilized for this kit's receiver and servo.

- Check the 2-channel proportional controller for correct operations as follows:

- ① Insert batteries in the transmitter and receiver.
- ② Connect the receiver's power and servo leads to the receiver.
- ③ Extend the transmitter antenna.
- ④ Turn ON the transmitter switch. (Always turn ON the transmitter switch.)
- ⑤ Turn ON the receiver switch.
- ⑥ Set the trim levers at their neutral positions.
- ⑦ Set the levers at their neutral positions. (The servo horns should stop at their neutral positions.)
- ⑧ Check servos operation by moving the levers.
- ⑨ Turn OFF the receiver first and then the transmitter when the test is complete. Refer to the radio control equipment instructions for further details.

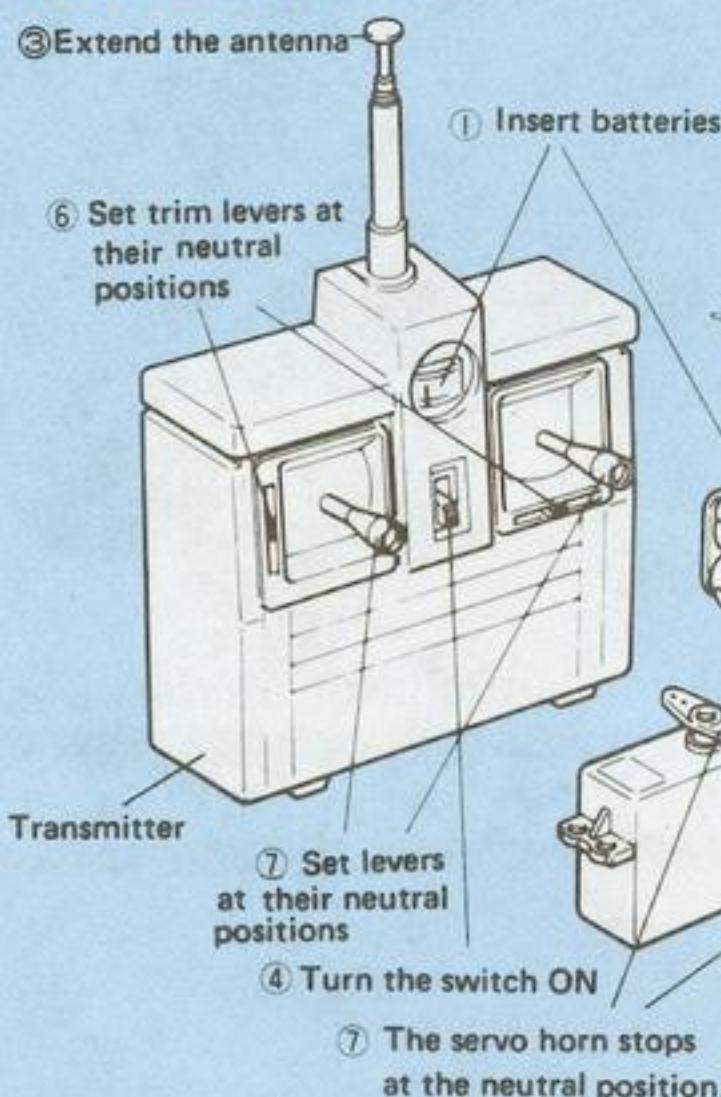

Receiver

② Insert the connector.

Servo

Servo

Transmitter

★ Read the following instructions carefully before assembly

- Read the entire instructions carefully and understand the structure well before starting assembly. This ensures smooth assembly.
- A <グリス> grease mark indicates a portion where the grease included in the kit must be applied. Similarly, a small hammer should be used when the <ハンマー> hammer mark appears.
- The screws and washers to be used for assembly are shown in actual sizes. Ensure the use of correct components by comparing their actual sizes according to the chart before assembly.

- Some screws, nuts, and washers may be left over as more than required numbers are included in this kit. Use them as spare parts.

- Thoroughly remove plastic part burrs using a cutter knife.

* Strengthened nylon part burrs must be completely removed as they may impair driving performance. (Be careful not to cut your fingers with a cutter knife.)



«Metallic part actual sizes used on P. 3»

φ 3 x 8 flat-head screw 2 pcs

2 mm nut 2 pcs

Front shaft 2 pcs

Front suspension shaft (Long) 2 pcs

φ 3 x 12 tapping screw 2 pcs

3 mm nut 5 pcs

Free ball (A) 2 pcs

φ 2 x 16 Spring pin 2 pcs

3 mm spring washer 4 pcs

3 mm washer 4 pcs

φ 3 x 8 screw 3 pcs

φ 3 x 10 spacer 4 pcs

1 Under guard and front suspension mount assembly

• For 7.2 V battery:

3 mm nut
3 mm spring washer

3 mm washer

Under guard

φ 3 x 8 flat-head screw

Chassis

• For 6 V battery : Install parts 9 as shown.

φ 3 x 12 tapping screw

3 mm nut

Under guard

φ 3 x 8 flat-head screws

Front suspension mount

3 mm nut

Chassis

φ 3 x 8 screw

2 Lower arm assembly

Temporarily tighten for adjustment in the latter Step.

Front suspension shaft (Long)

Thoroughly cut the burr with a cutter.

φ 3 x 10 spacer

Nylon pin

Lower arm

φ 2 x 16 spring pin

Spring pin does not protrude this side.

Front

3 Knuckle arm assembly

Free ball (A)

Right

Tighten into the outside hole.

2 mm nut

57

Front shaft

Left

«Assembly appearance»

⚙️Metallic part actual sizes

used on P. 4>

φ 3 x 6 screw
..... 2 pcs

φ 3 x 12 flat-head screw
..... 3 pcs

φ 2 x 16 spring pin
..... 2 pcs

Partially nylon 4 mm locknut 2 pcs

3 mm nut
..... 5 pcs

6 mm washer
..... 4 pcs



Bumper metal
..... 2 pcs

Piano wire

Front suspension shaft (short) 2 pcs

Front suspension spring
..... 2 pcs


4 Upper arm assembly

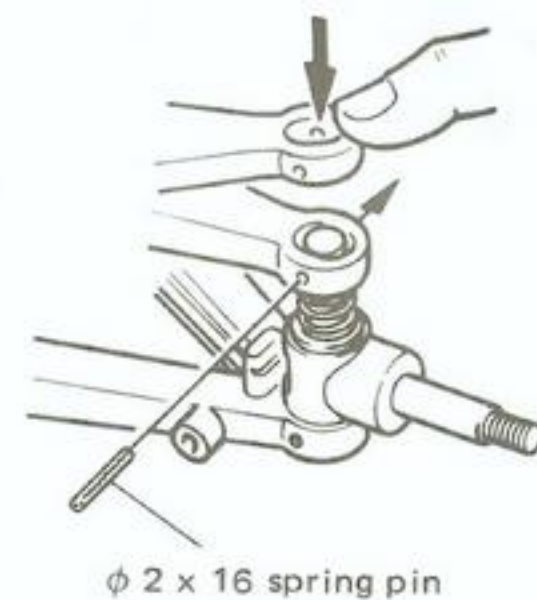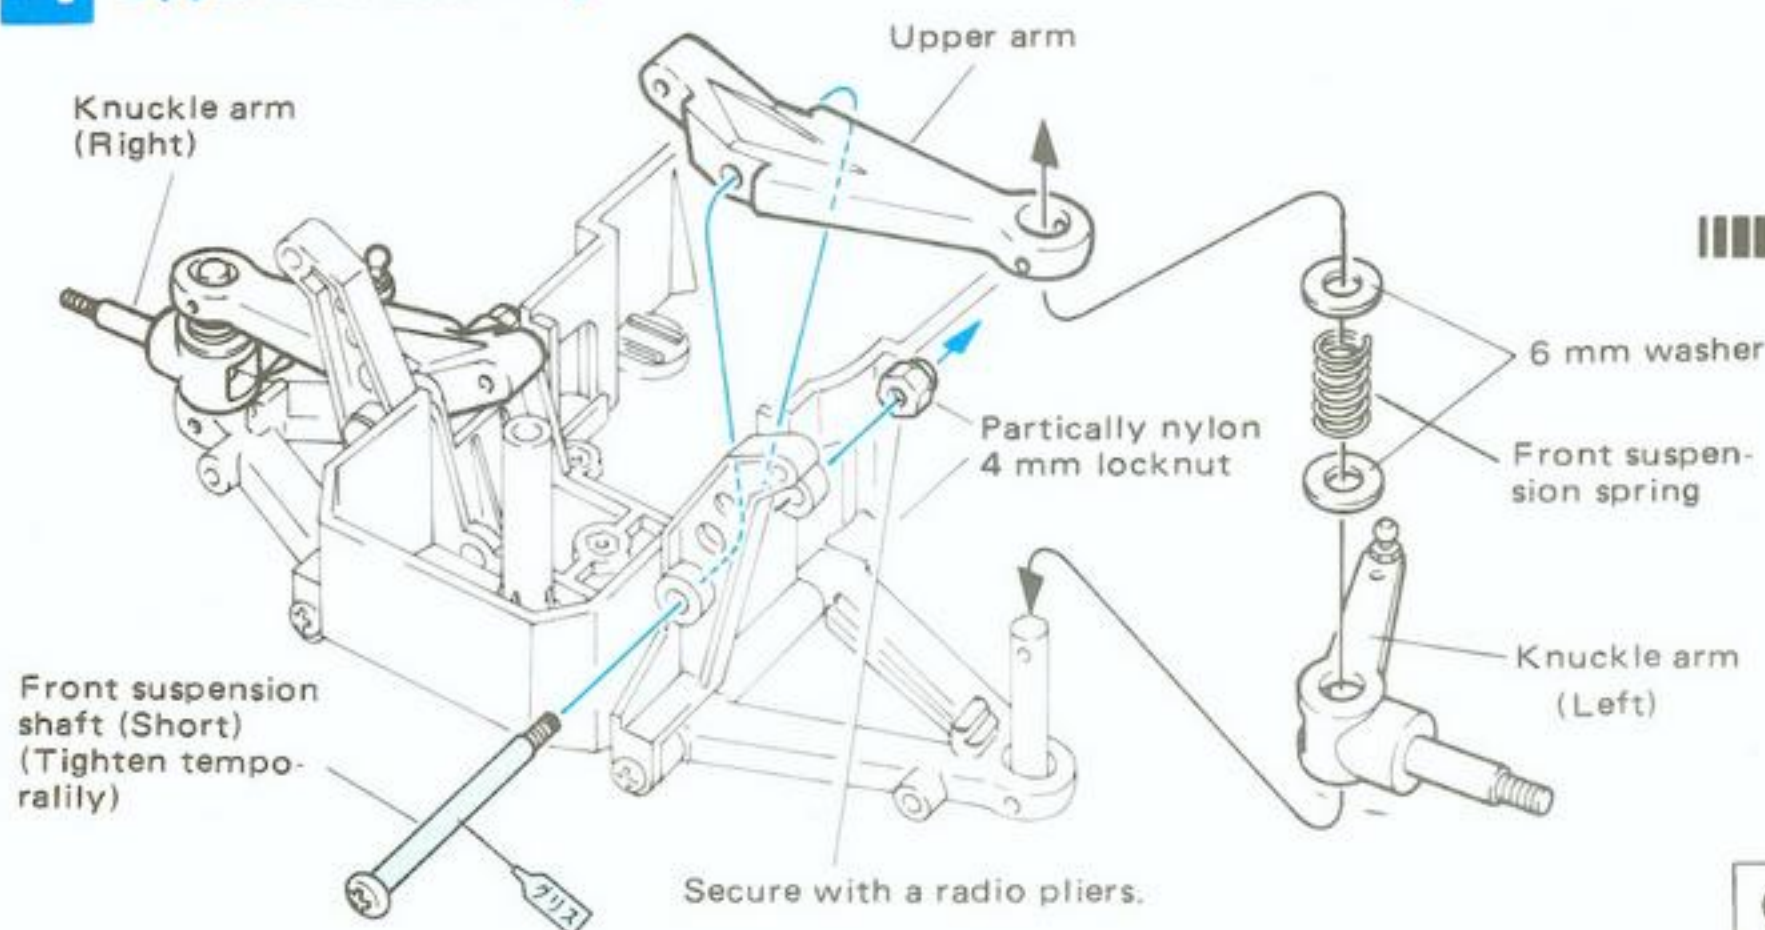


* Spring pin does not protrude to the front side as in the case of lower arm.

5 Front suspension adjustment

Tighten these shafts such that upper and lower arms move smoothly.

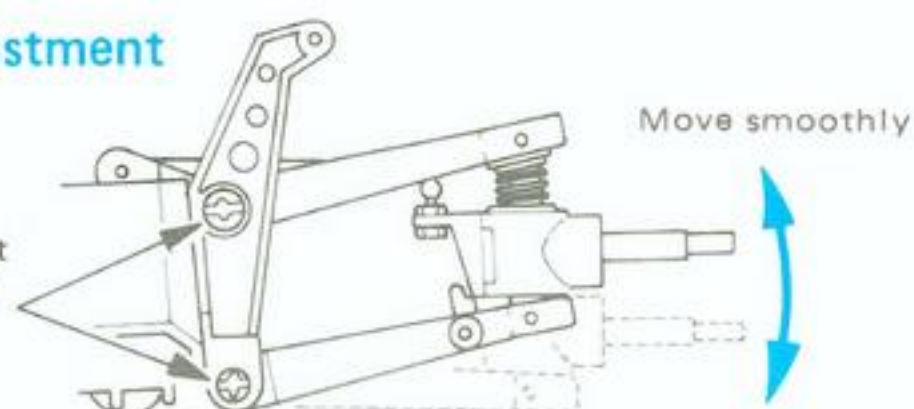



6 Bumper and stabilizer assembly

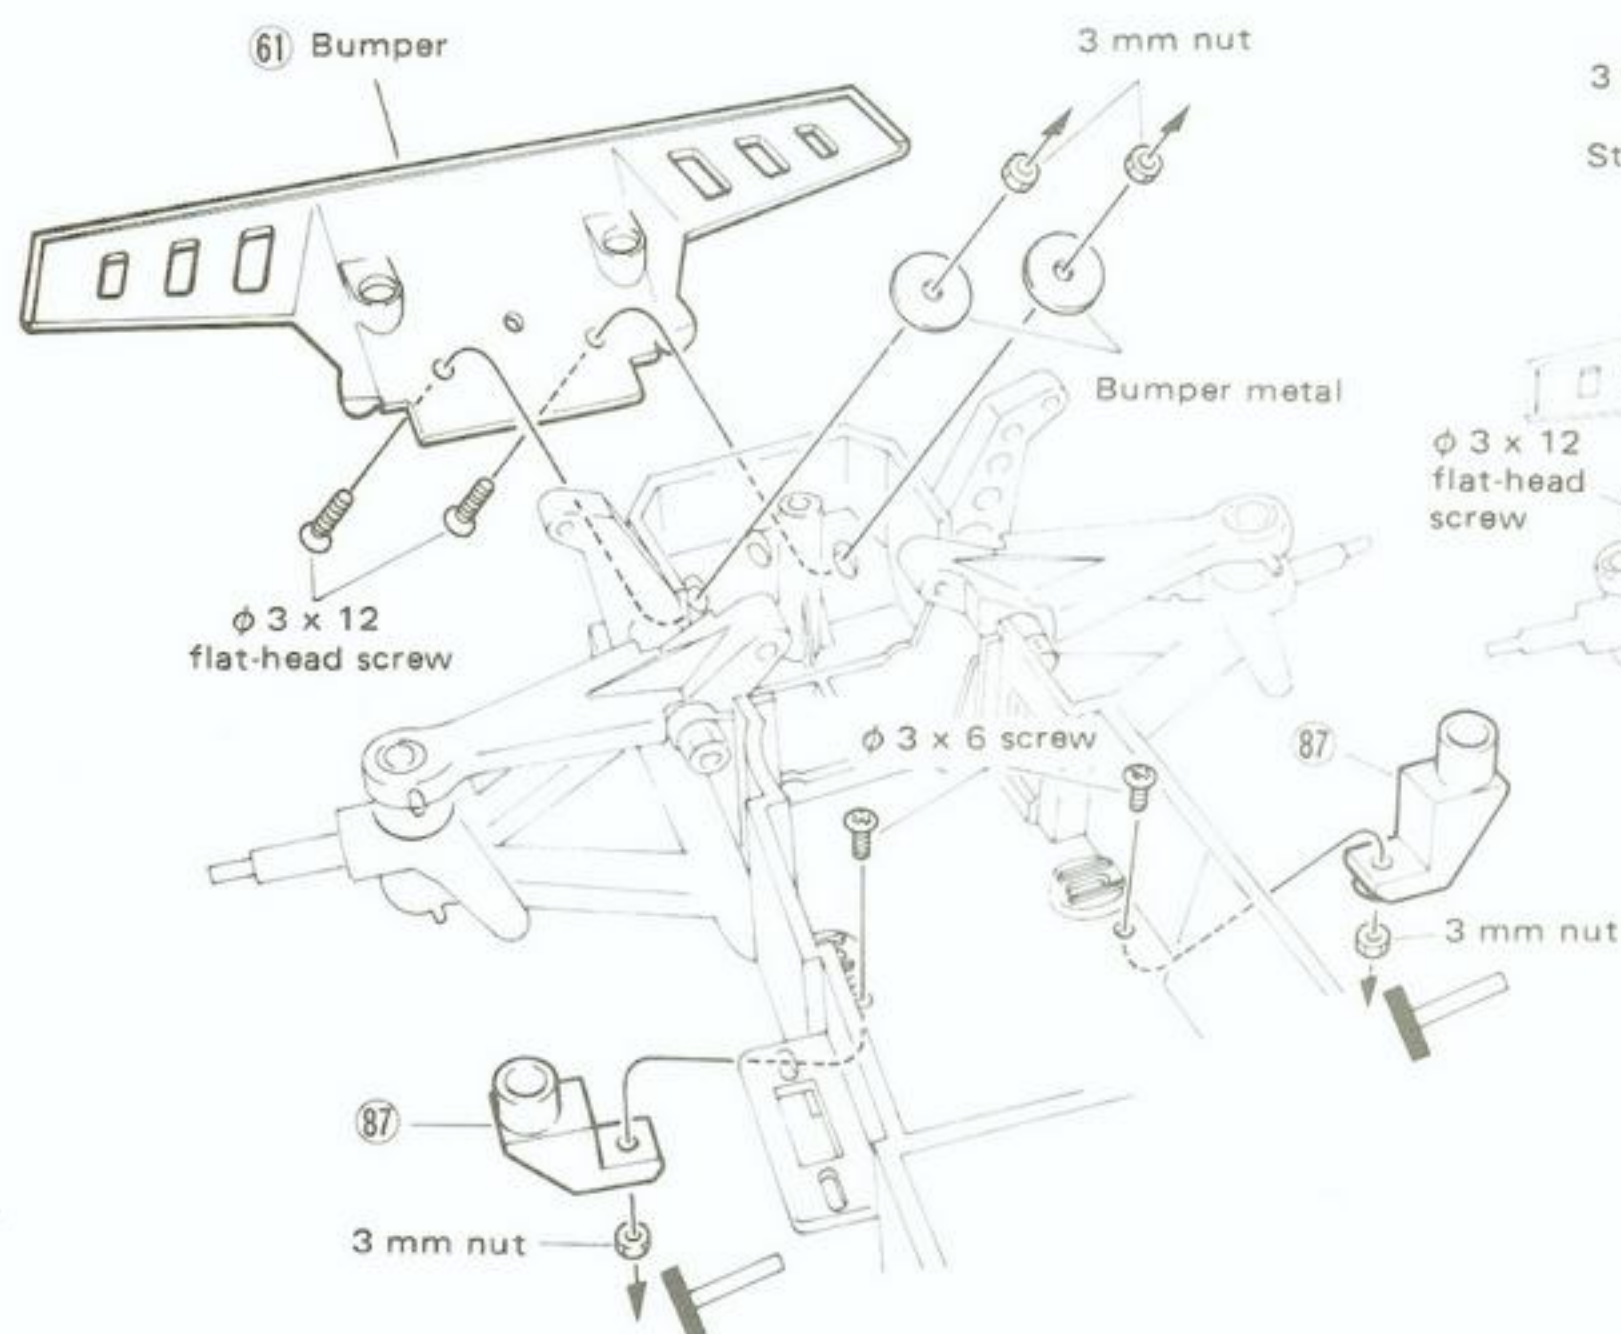


● Stabilizer Assembly

Bend a piano wire, at a bench or other convenient area, as shown in the Figure.

Approx. 3 mm

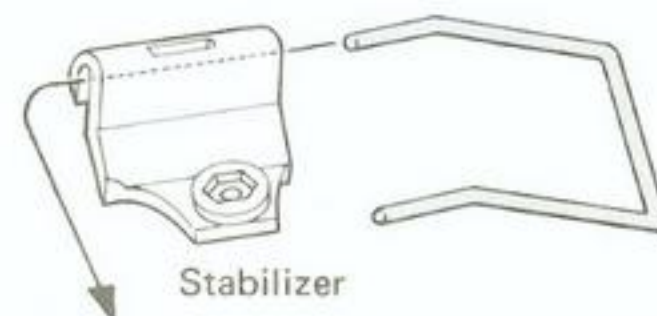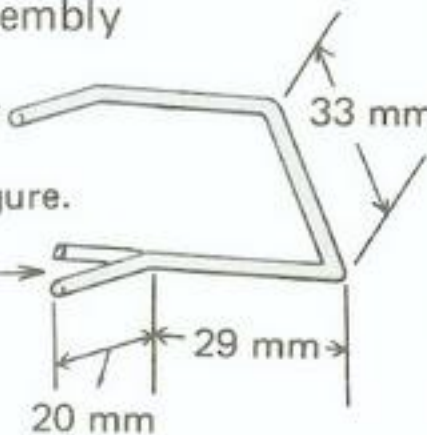

Cross-sectional view

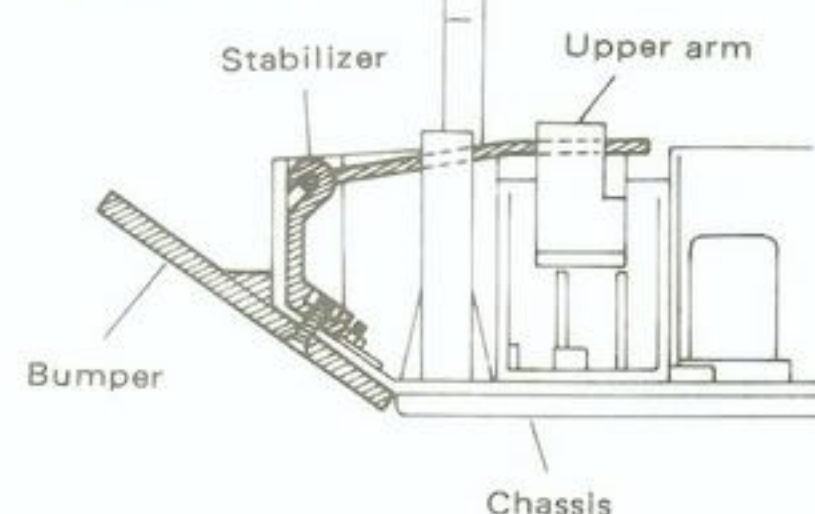

«Metallic part actual sizes used on P. 5»

$\phi 4 \times 12$ tapping screw 8 pcs

3 mm nut 1 pc

$\phi 5 \times 6$ butt screw 2 pcs

$\phi 2 \times 10.5$ bushing pin 2 pcs

$\phi 4 \times 11.5$ bevel shaft 2 pcs

$\phi 2.5 \times 12$ differential center shaft 1 pc

Differential shaft 2 pcs



Bevel bushing (Plastic) 2 pcs

Oilless metal 4 pcs




Bevel gear (A) 2 pcs (Plastic)

Bevel gear (B) 2 pcs




Universal joint 2 pcs


7 Driving the metal and bonding the driver

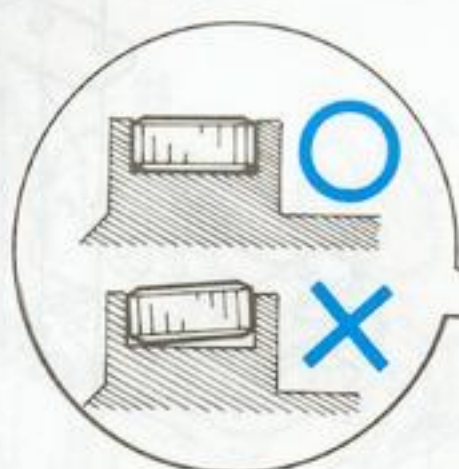

* Drive the metal completely as shown.

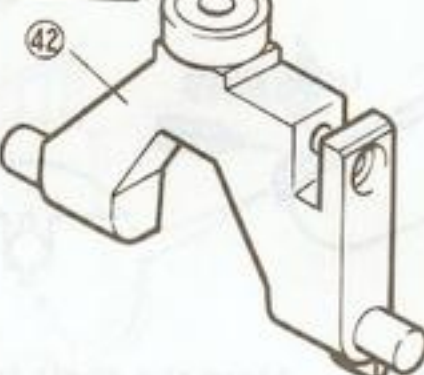


Paint the driver following the picture on the package as an example.

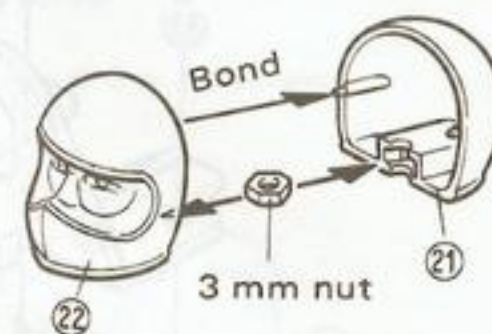

8 Gear assembly

«Differential shaft assembly»

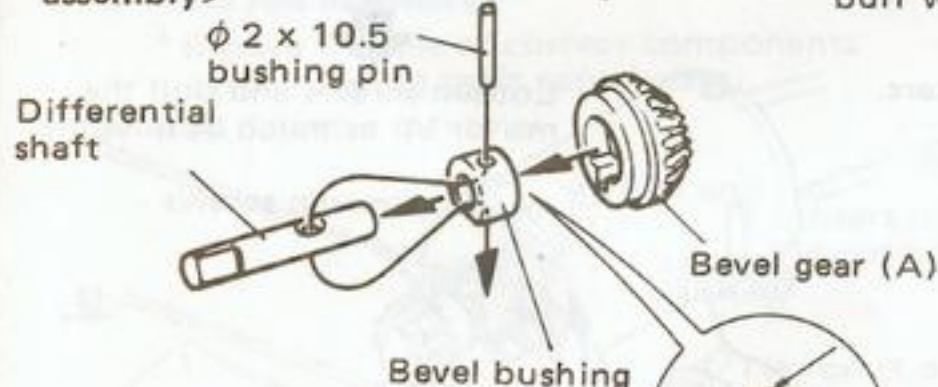

Thoroughly cut this burr with a cutter.



$\phi 5 \times 6$ butt screw



Tighten the butt screw on the shaft flat surface.

Chassis cross-section

Clearance of approx. 0.3 mm (Roughly one post card width)

The surface with a projection faces the direction shown in Fig.

Projection

Differential center shaft ($\phi 2.5 \times 12$)

Face with a projection

Universal joint

Oilless metal


Chassis

«Differential gear assembly»

Assemble in order 1 through 4



Push the inclined bevel gear (B) from the bottom of differential gear.


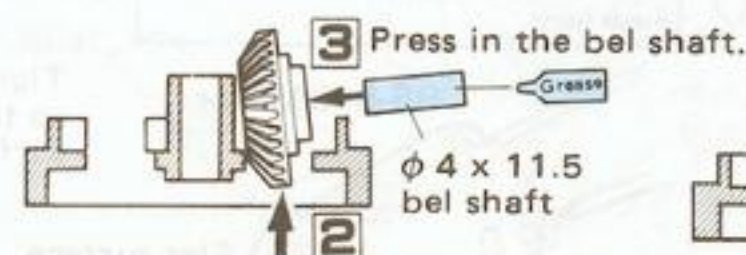


Completely push up bevel gear (B)



Assemble the differential gear (Left) in the same manner.

9 Gear assembly

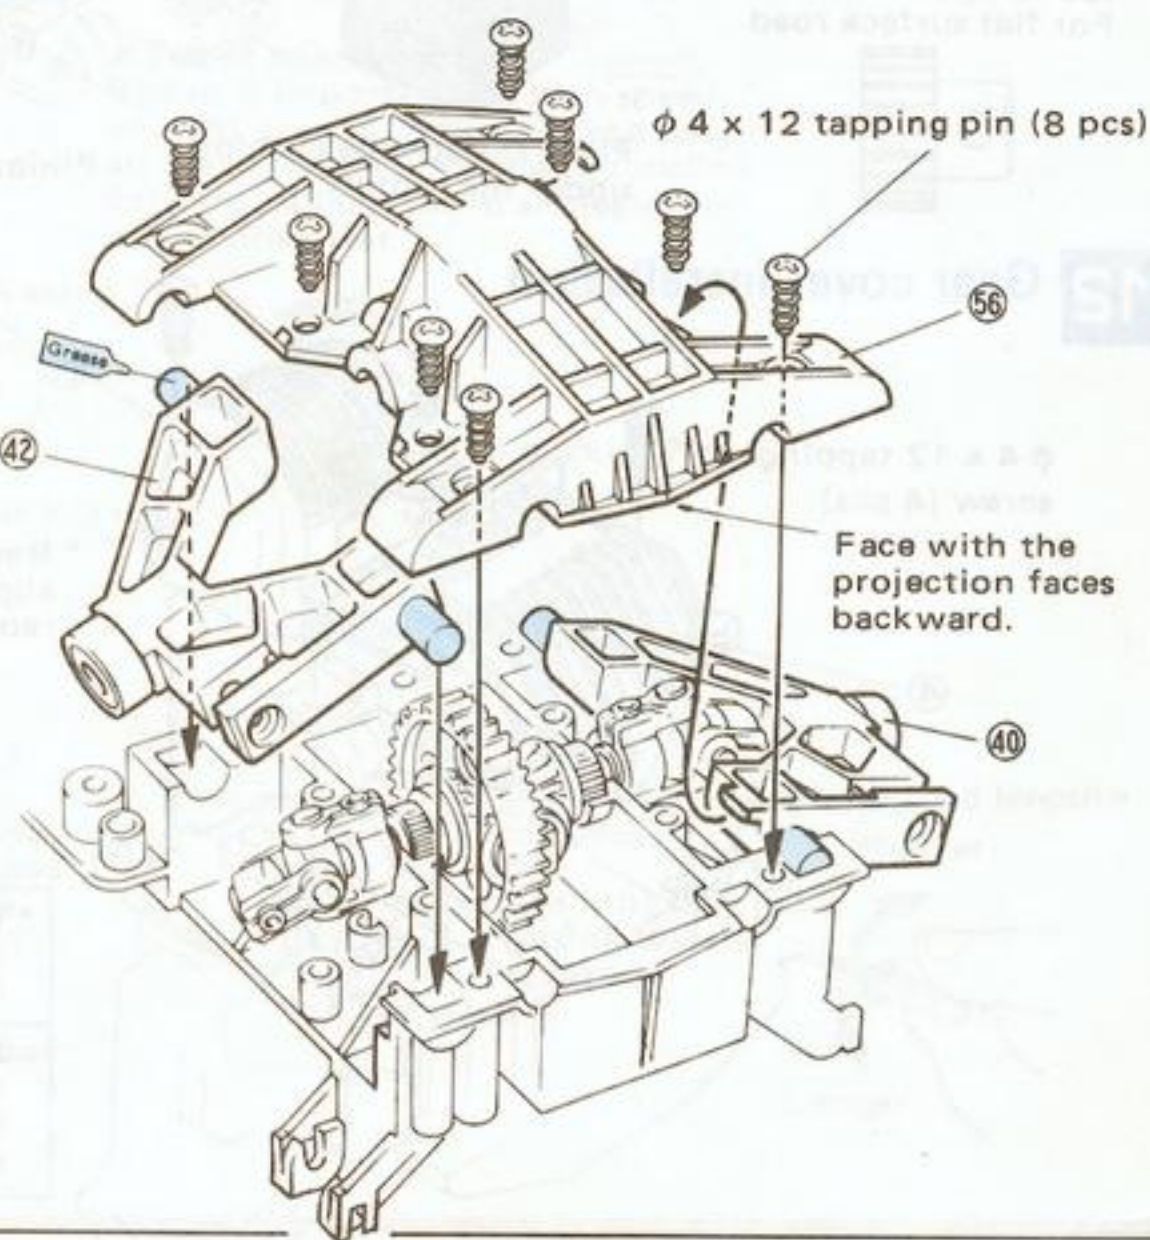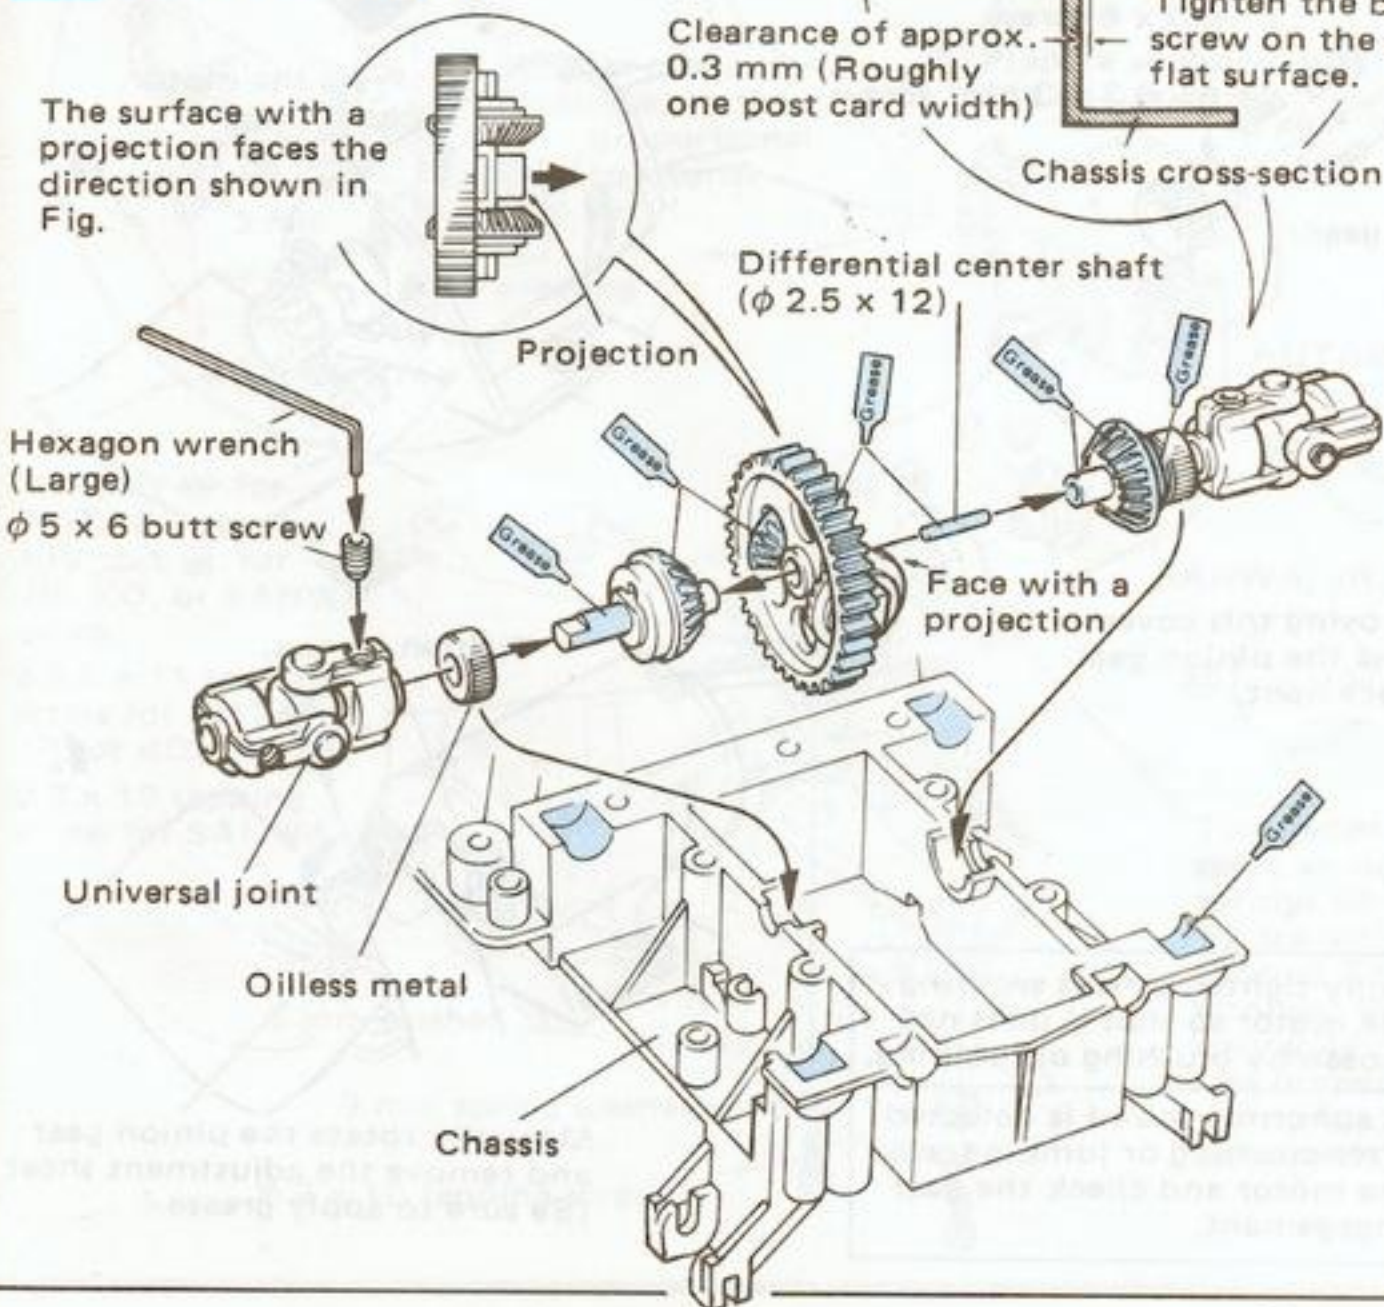

«Metallic part actual sizes used on P. 6»

φ 3 x 6 screw 2 pcs

φ 3 x 10 tapping screw 2 pcs

φ 4 x 12 tapping screw 7 pcs

3 mm washer 3 pcs



φ 3 x 3 butt screw 1 pc

Idler shaft 1 pc

3 mm spring washer 2 pcs

4 mm spring washer 3 pcs

10 Motor mount and idler gear installation

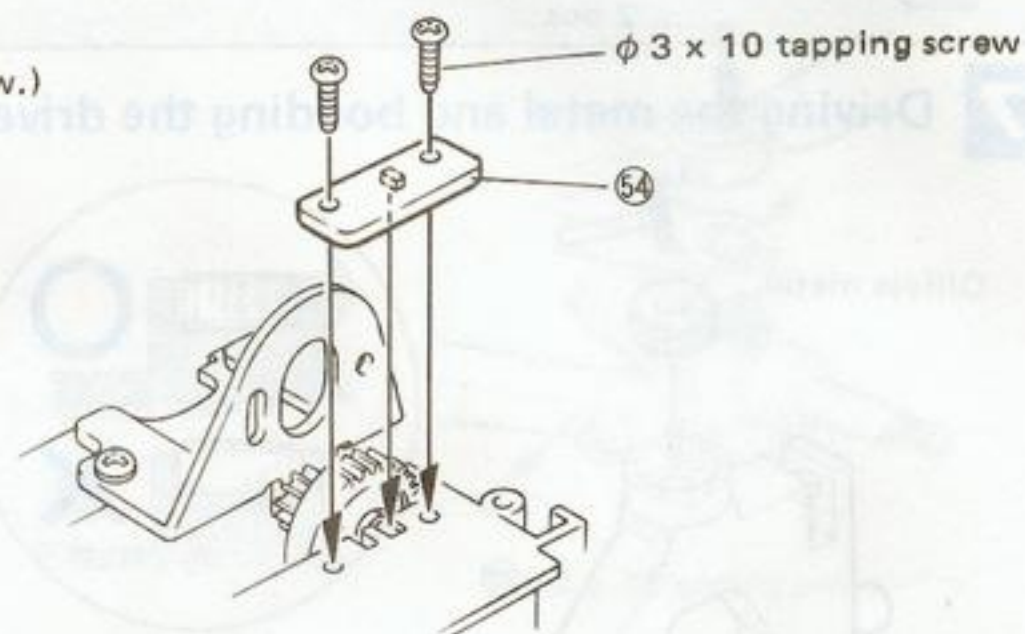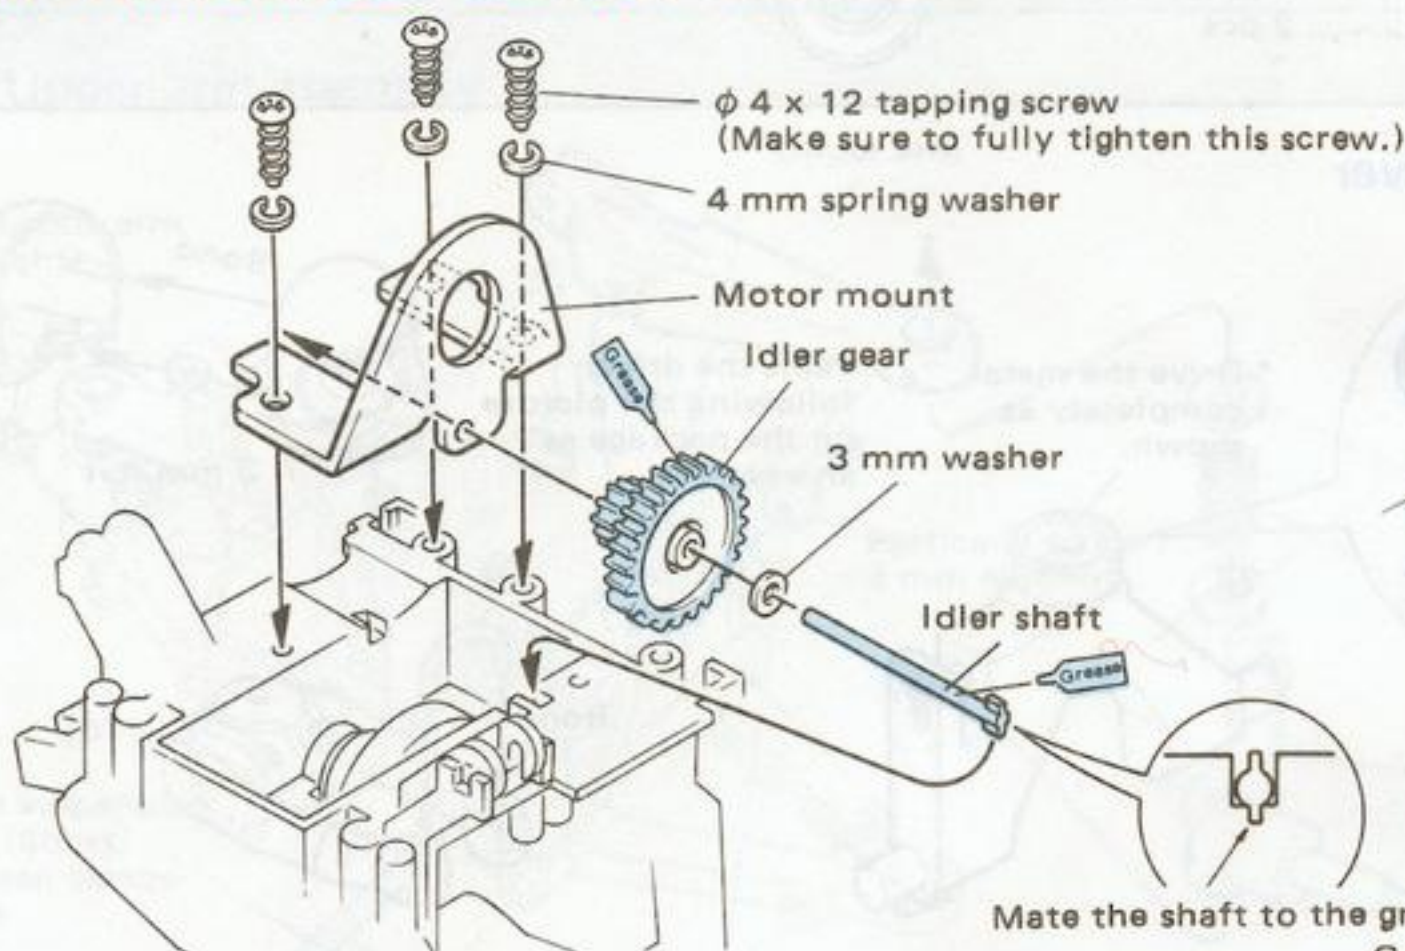

«Attaching the pinion gear»

Gear engagement adjustment sheet included in the kit.

11 Pinion gear and motor installation

The motor becomes hot after operation. Be careful not to burn yourself.

«Pinion gear selection»

Select the proper pinion gear for driving conditions.


- High torque pinion gear (18 tooth): For rough surface road



- Regular pinion gear (20 tooth):




- High-speed pinion gear (22 tooth): For flat surface road




If an object such as a washer, staple, or pebble enters the hole in the motor, the motor will stop rotating and damage will result. To avoid such troubles, assemble the motor separately, away from other metal parts.

«Pinion gear position»

Align the centers.

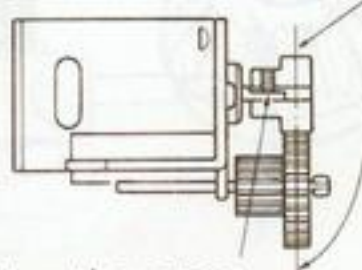

Tighten the screw so that both gear surfaces are levelled.

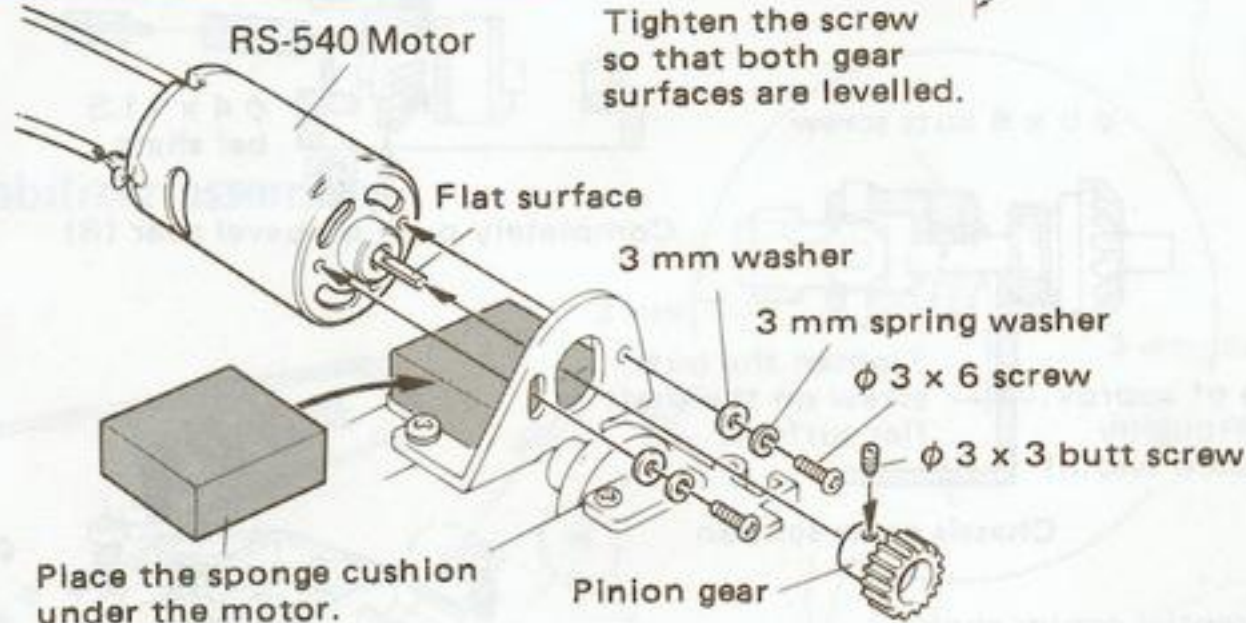

Loosen screws and pull the motor up as much as possible.

Loosen screws

Place the adjustment sheet between the pinion gear and idler gear.


Press the motor.

Tighten screws.

Manually rotate the pinion gear and remove the adjustment sheet (Be sure to apply grease.)

12 Gear cover installation

φ 4 x 12 tapping screw (4 pcs)

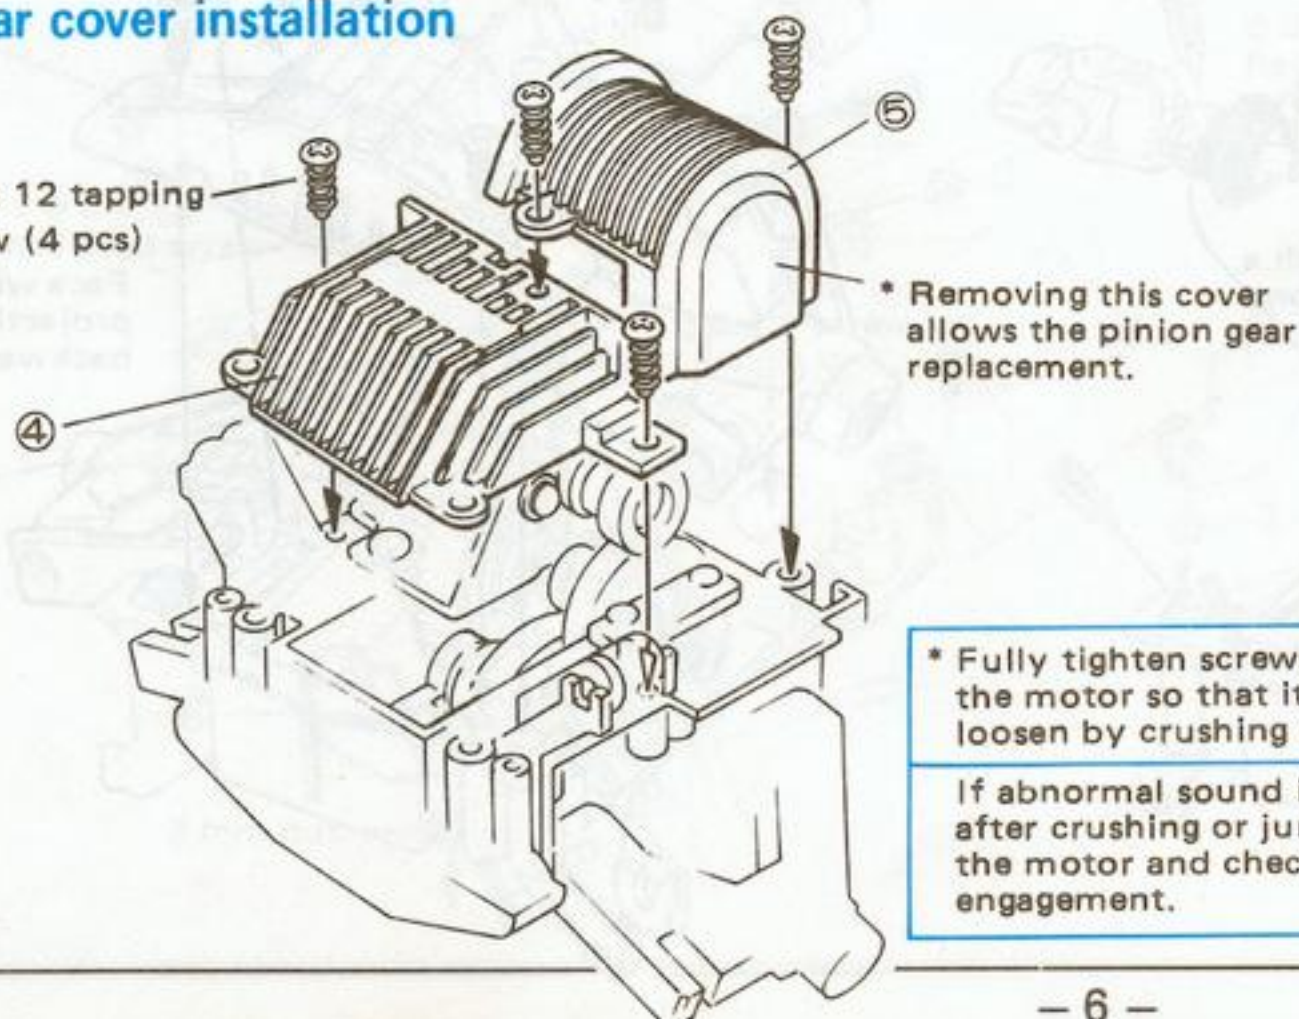

* Fully tighten screws securing the motor so that it does not loosen by crushing or jumping.

If abnormal sound is detected after crushing or jumping, stop the motor and check the gear engagement.

«Metallic part actual sizes used on P. 7»

φ 3 x 10 screw 4 pcs

φ 3 x 18 screw 2 pcs

φ 2.6 x 11 tapping screw 1 pc
(For servos of FUTABA, JR, or KO)

φ 3 x 10 tapping screw 3 pcs

3 mm spring washer 4 pcs

φ 3 x 14 screw 2 pcs

φ 4 x 12 tapping screw 2 pcs

3 mm washer 8 pcs


3 mm nut 6 pcs

Rod adjuster (Long) 1 pc
58.8 mm (Aprox. 59 mm)

42.5 mm

Rod adjuster (Middle) 1 pc


13 Rear guard installation

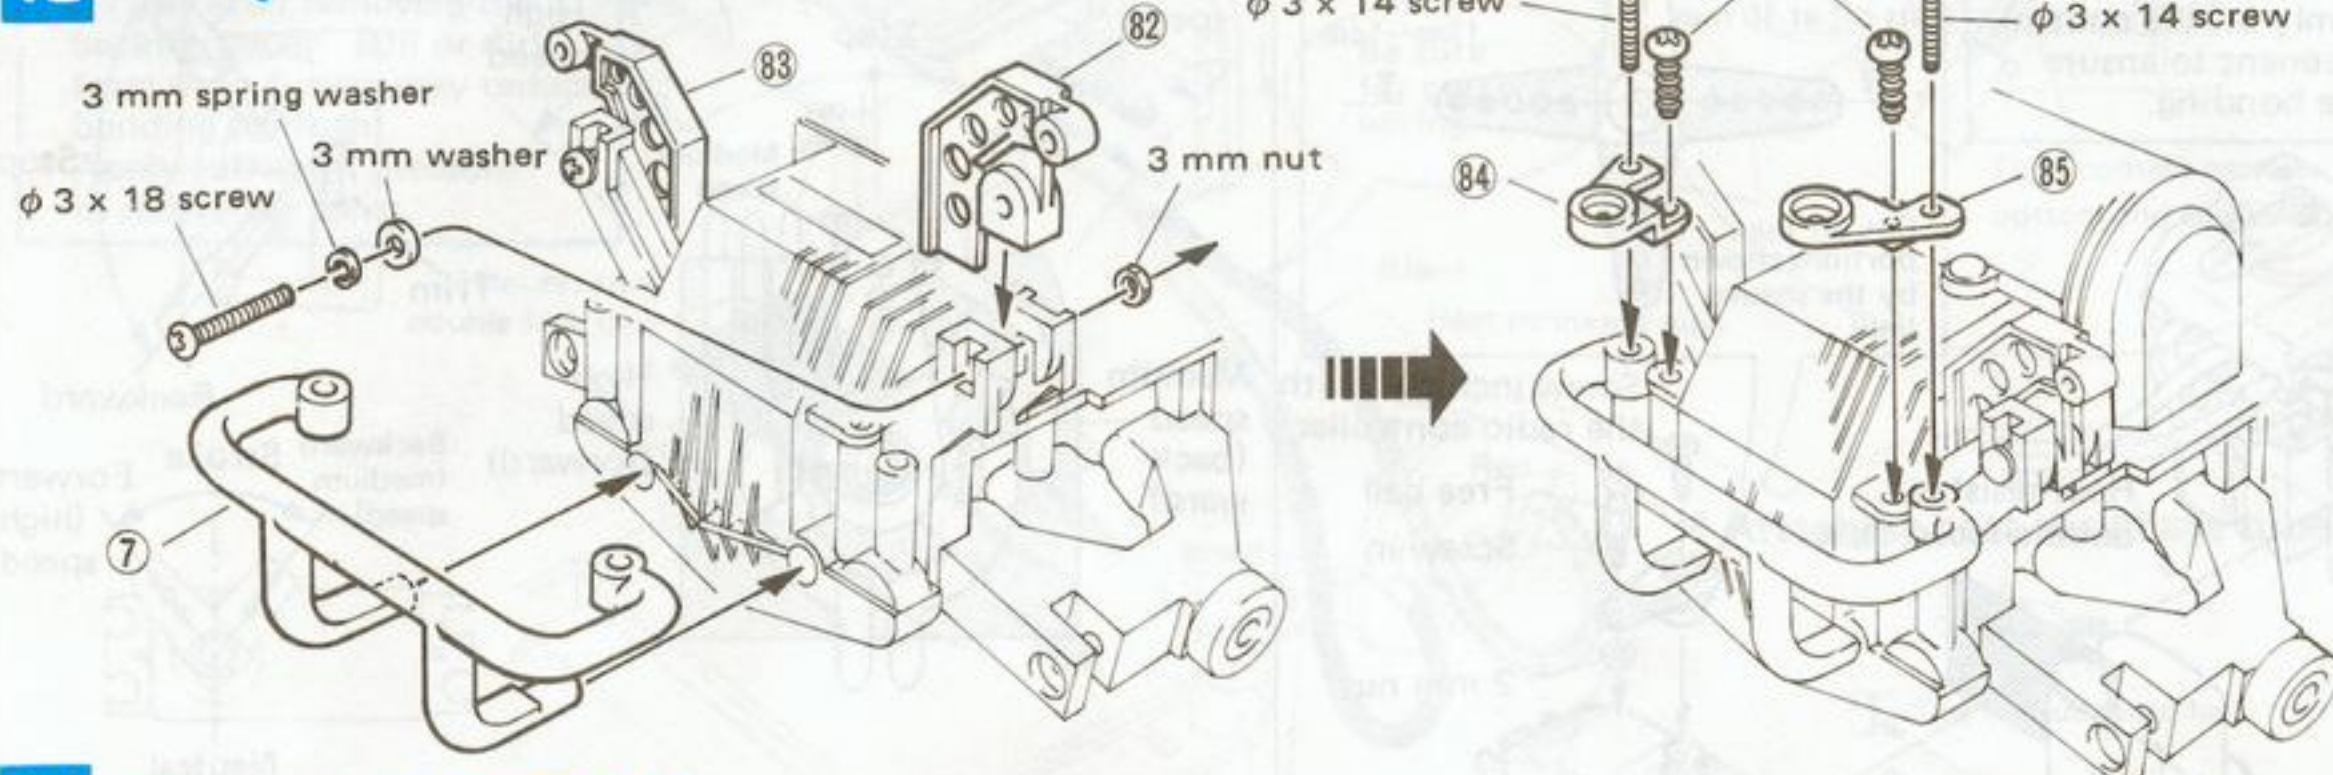

14 Steering servo assembly

«Tie rod assembly»

* Ensure the use of correct components by comparing their actual sizes.

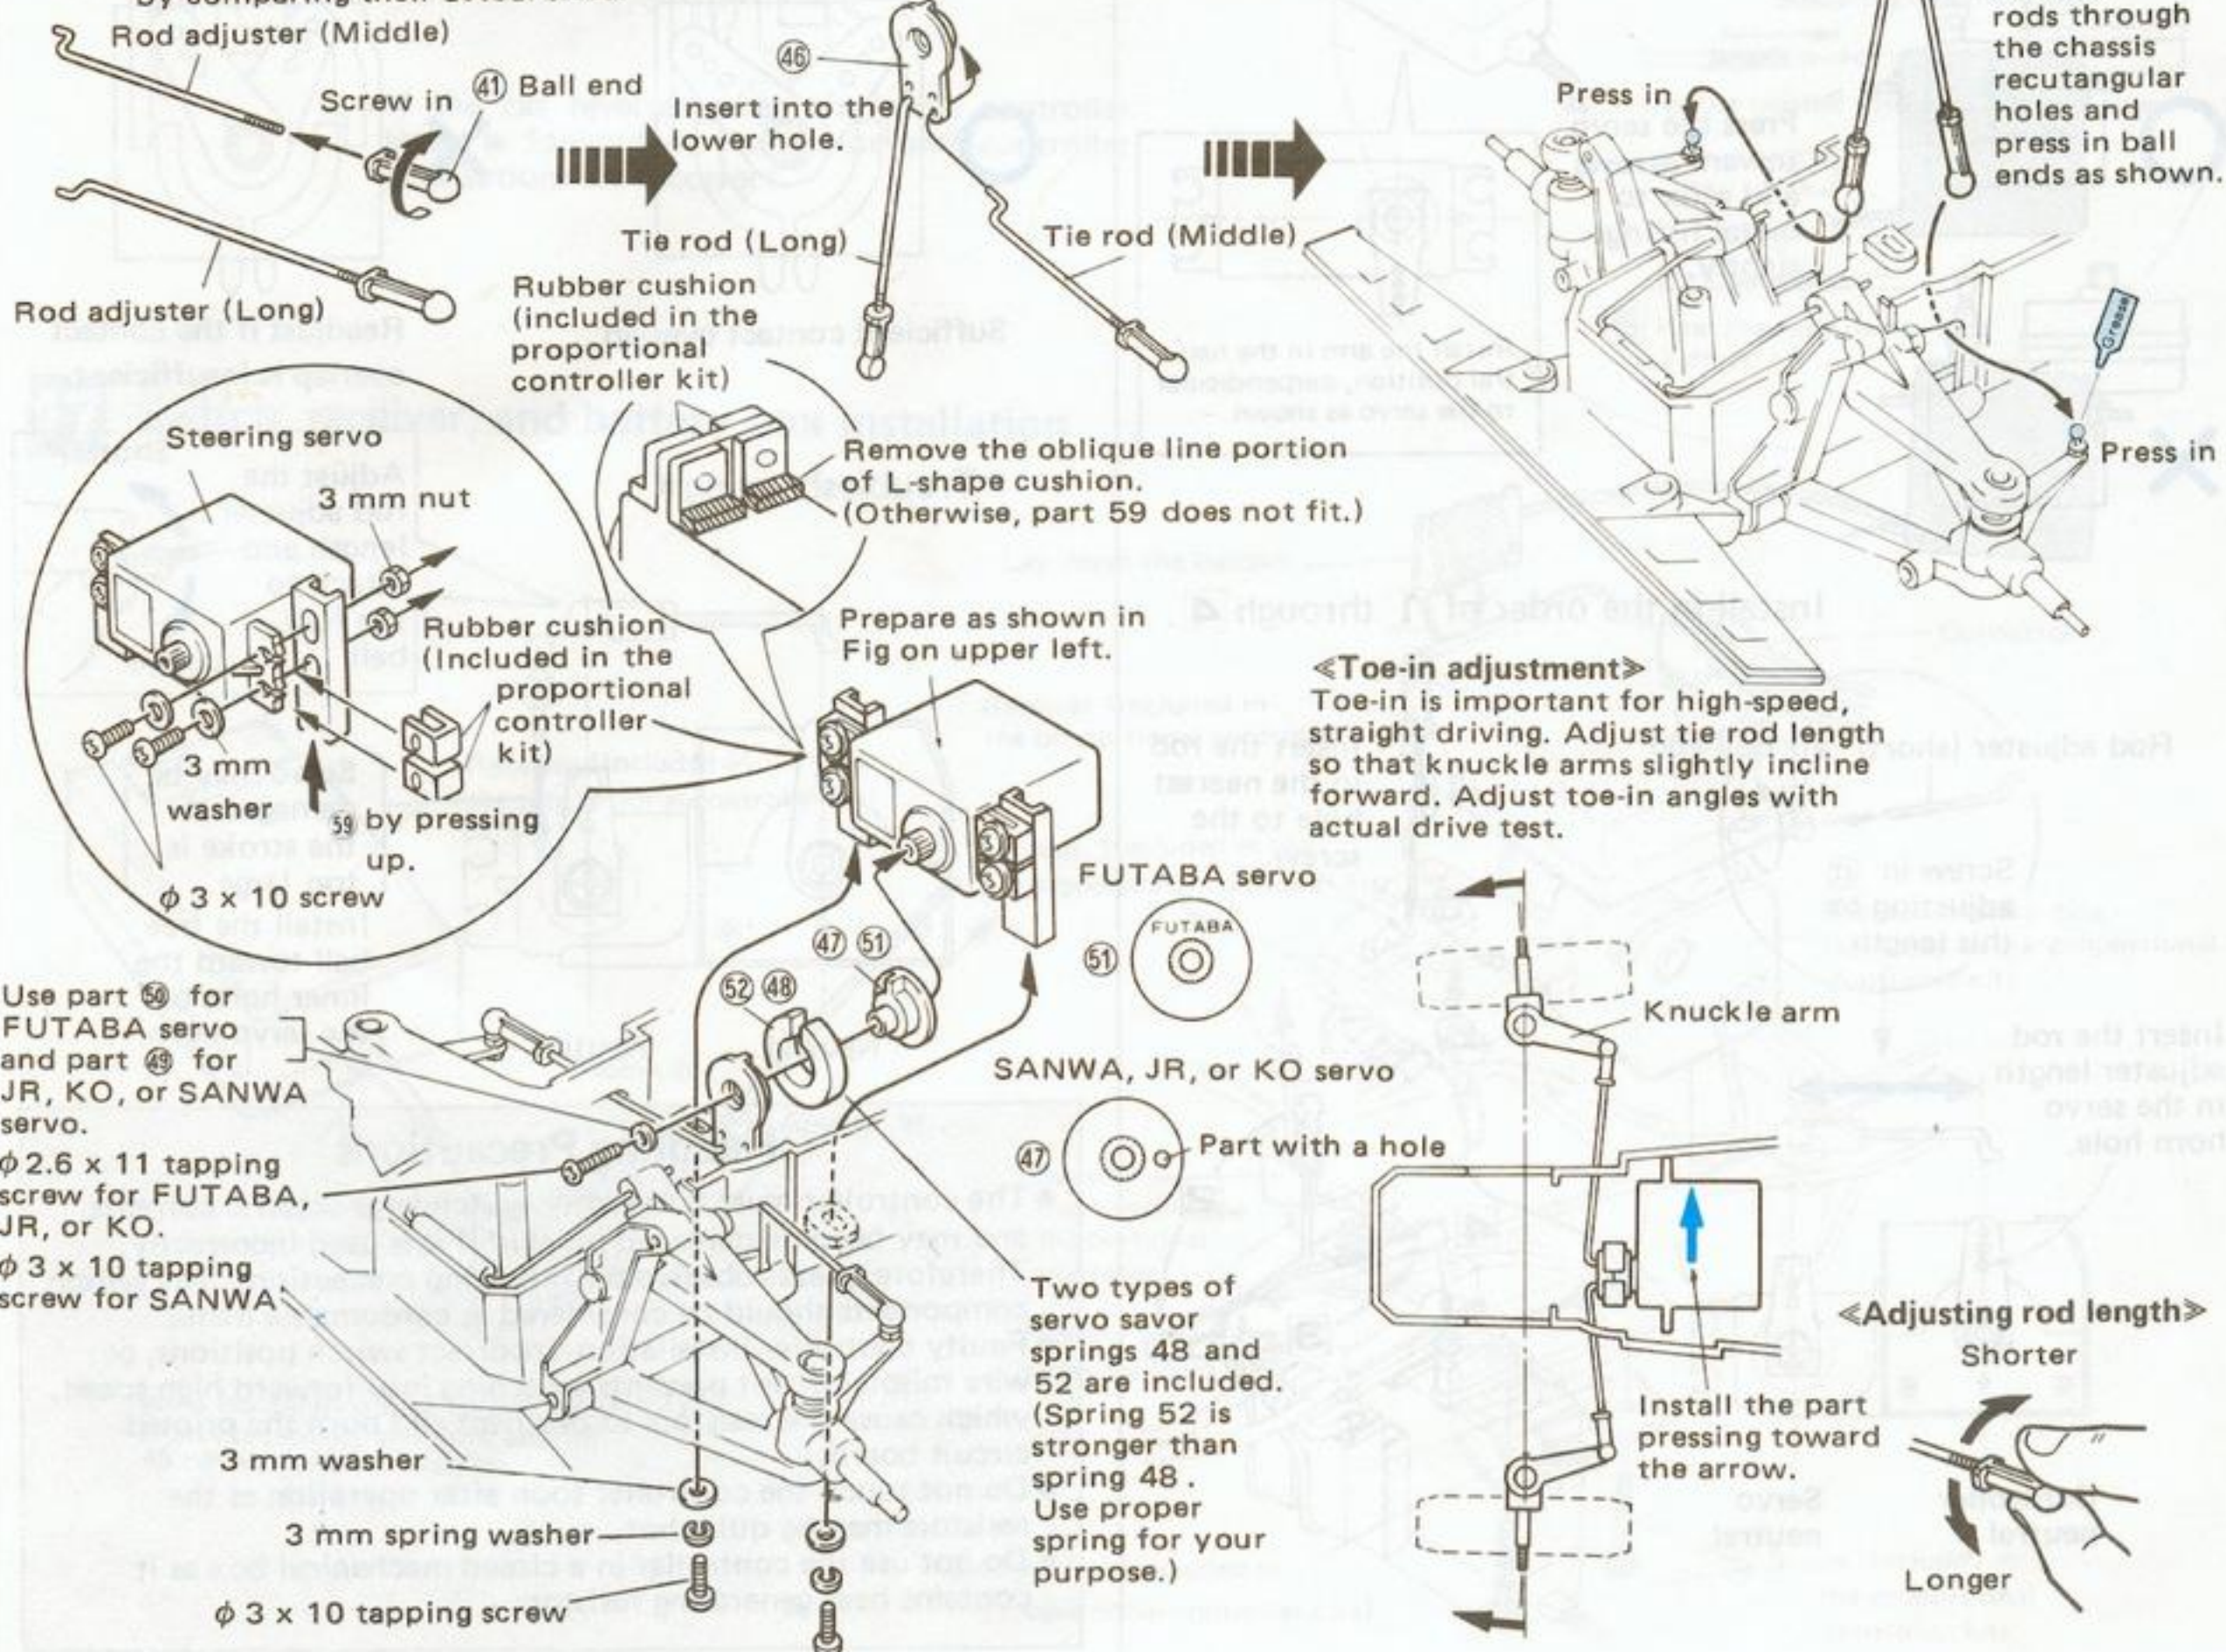

15 Speed controller assembly

(Connect the two servos with the receiver during this assembly. (See p.2 for details.)

«Metal part actual sizes used on p.8»



2 mm nut
... 1 pc

Free ball
... 1 pc


Rod adjuster (short)
... 1 pc

- Clean tape mounting areas with paint thinner for plastics or other suitable solvent.
- Do not touch the adhesive surface after removing the backing paper. (Oil on your fingers may reduce bonding strength.)
- Press firmly on the controller component to ensure complete bonding.


Servo horn (included with the radio controller)
Use a servo horn 12 to 14 mm from the center.

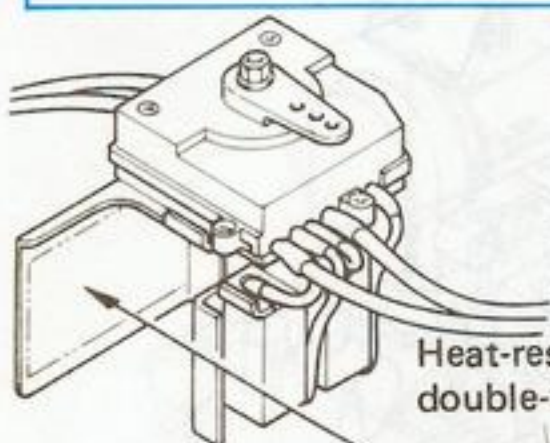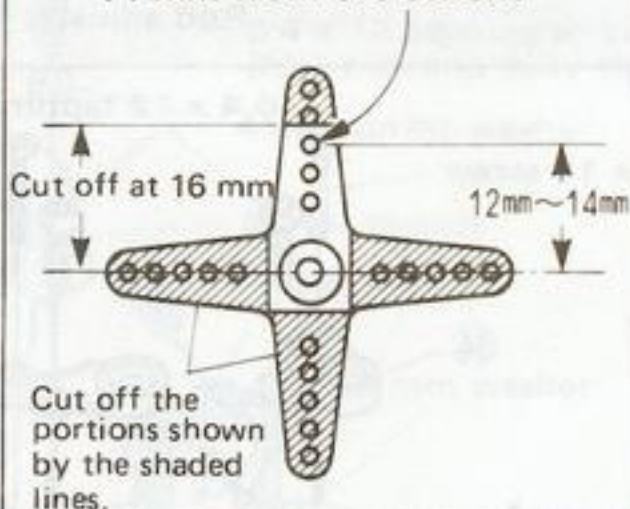



Heat-resistant double-faced tape

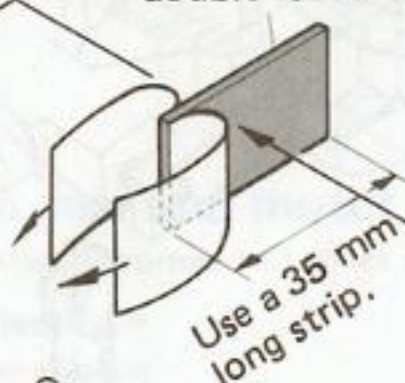

Use a 35 mm long strip.

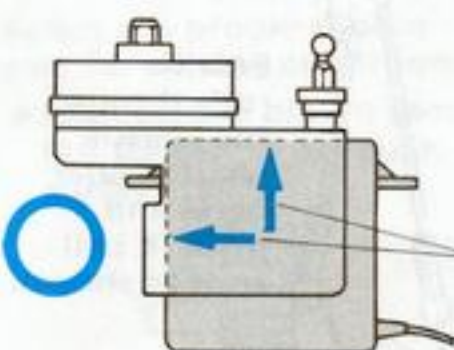


Press the servo toward arrows and affix to metal fittings tightly.

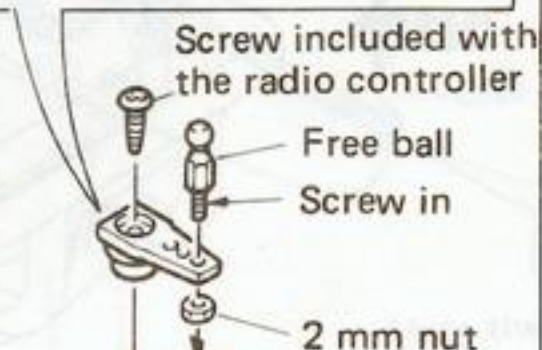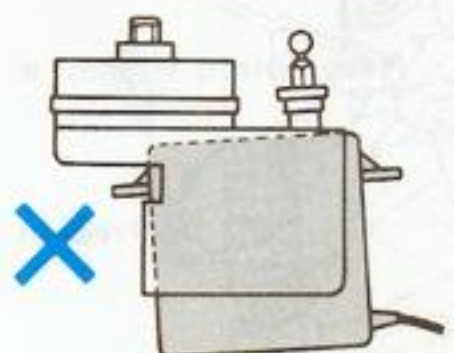

Screw included with the radio controller


Free ball
Screw in

2 mm nut

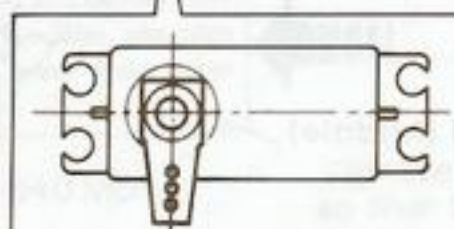


Install the arm in the neutral position, perpendicular to the servo as shown.


Install in the order of 1 through 4.

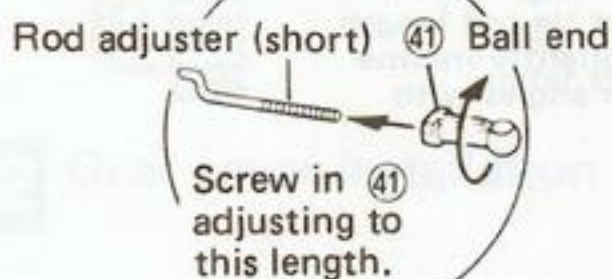


Insert the rod adjuster length in the servo horn hole.

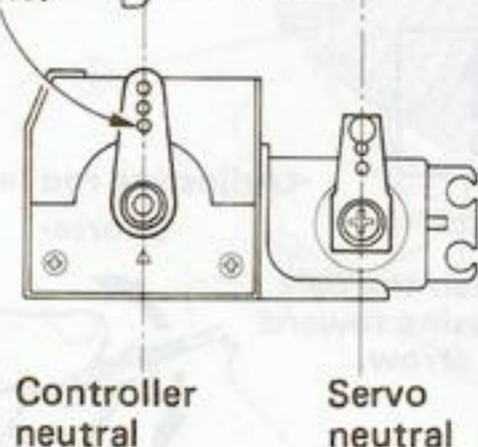

1 Insert the rod in the nearest hole to the screw.





2

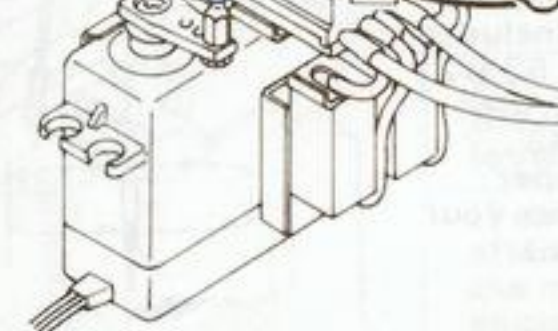


«Stroke adjustment»

- Servo horn stroke differs by servo type. Test to see if the switch arm moves all the way to its forward (high-speed) and reverse (high-speed) positions by moving the lever up and down.

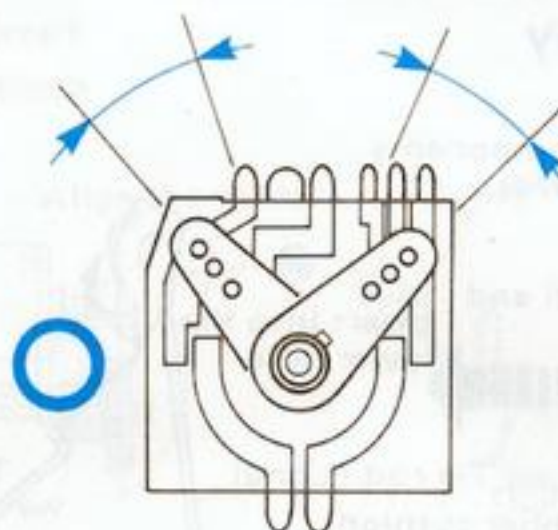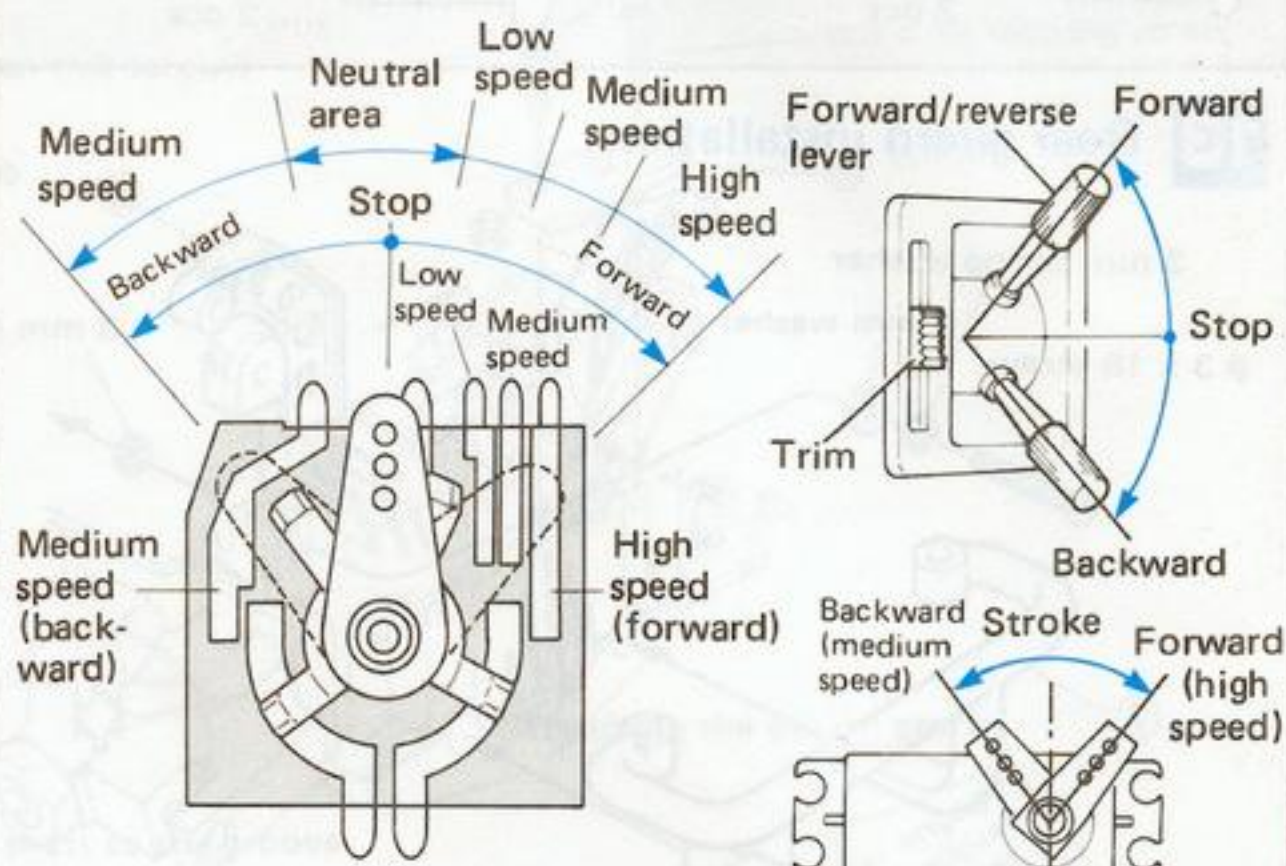


Sufficient contact overlap

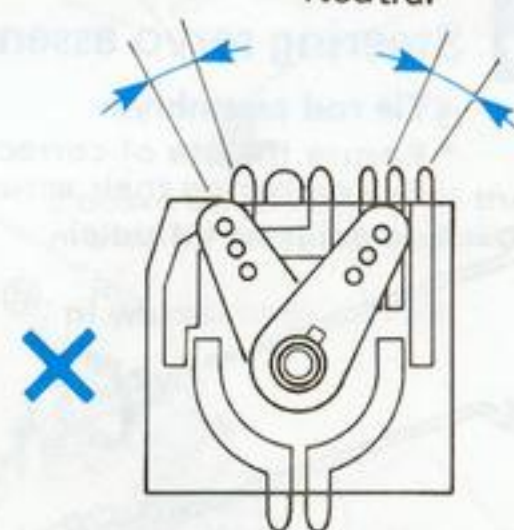

Readjust if the contact overlap is insufficient.

★Troubleshooting★

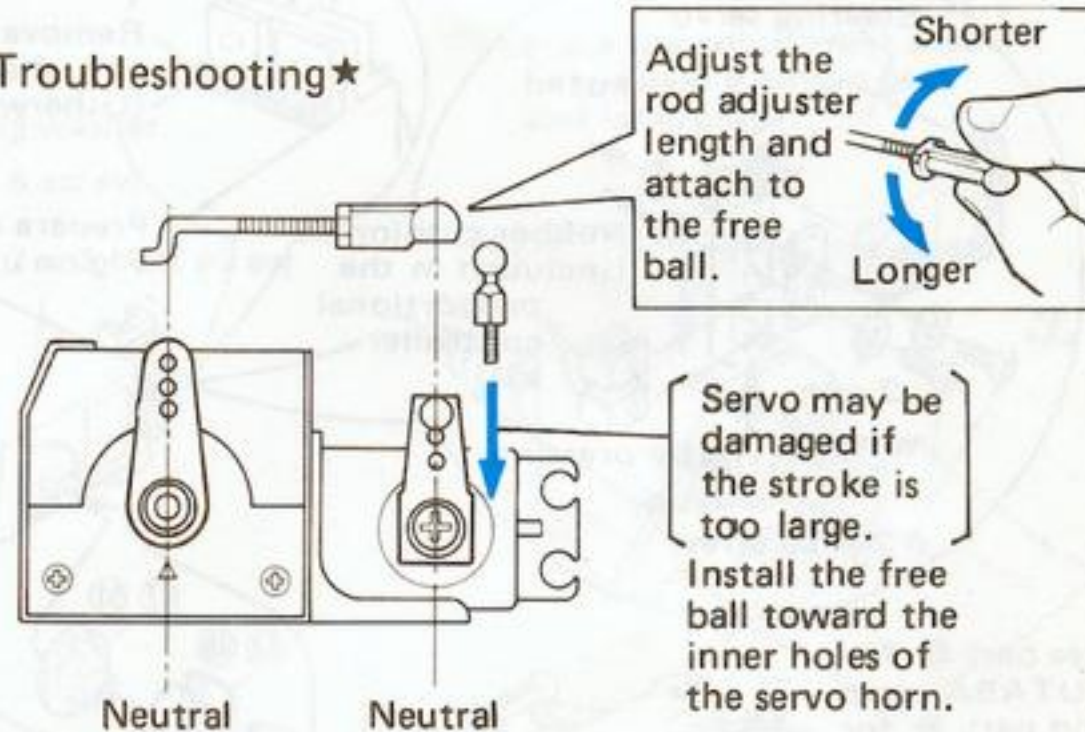

Handling Precautions

- The controller must frequently switch large electric currents, and may become damaged quickly if it is used incorrectly. Therefore, please observe the following precautions. The switch components should be considered as consumable items.
- Faulty controller installation, incorrect switch positions, or wire misplacement prevents switching into forward high speed, which cause the resistors to overheat and burn the printed circuit board.
- Do not touch the controller soon after operation as the resistors may be quite hot.
- Do not use the controller in a closed mechanical box as it contains heat generating resistors.

16 Speed control servo installation

- Clean bonding areas with thinner for use on plastic.
- Do not touch the adhesive surface after removing the backing paper. (Oil or dirt from your fingers may reduce bonding strength)
- Apply sufficient pressure to secure the servo.

Heat resisting double face tape

35mm

Be sure for correct wiring

Black

Heat shrinkage tube

Red

Black

Red

Locate the servo horn at this position.

Horn

Rib

Tight contact between servo bottom and chassis rib

« Attaching heat shrinkage tube »

1 Cut the tube into half.

2 Pass the wire through tube.

3 Twist the cords.

Soldering recommended

4 Cover the twisted cord area with the tube.

5 Heat the tube using a dryer.

- If the car reverses when the radio controller lever is forwarded, the motor and controller connections are incorrect.

17 Switch, receiver, and battery box installation



Receiver (Included in the proportional controller kit)

Bobbin ③1

Approx. 2 cm

Approx. 45 cm

Wind the antenna on a bobbin starting 2 cm from the receiver and leave approx. 45 cm on the other end free.

Lay down the bobbin.

Receiver (Included in the proportional controller kit)

Nut (Included in the proportional controller kit)

Switch (Included in the proportional controller kit)

Pressing toward the arrow switches OFF


Switch plate (Included in the proportional controller box)

Connector


Receiver battery box (Included in the proportional controller kit)

Screw (Included in the proportional controller kit)

«Metallic part actual sizes used on P. 10»

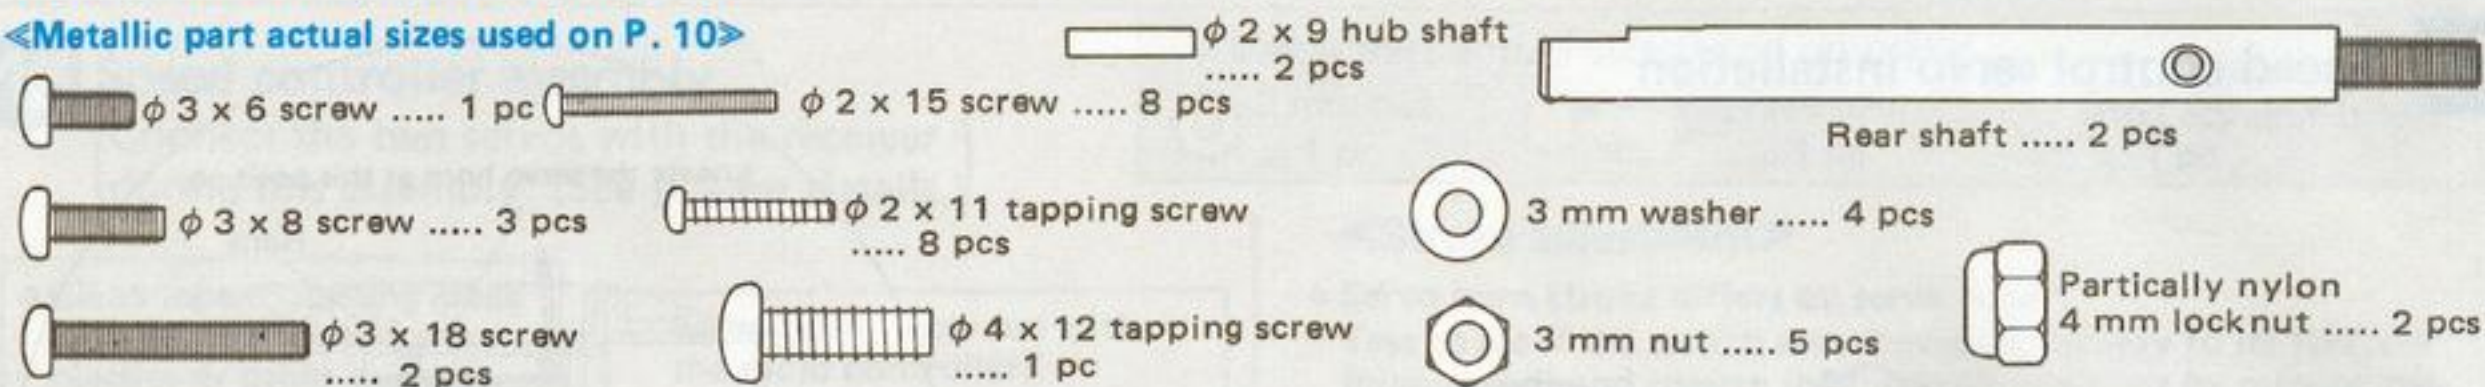

18 Chassis cover installation

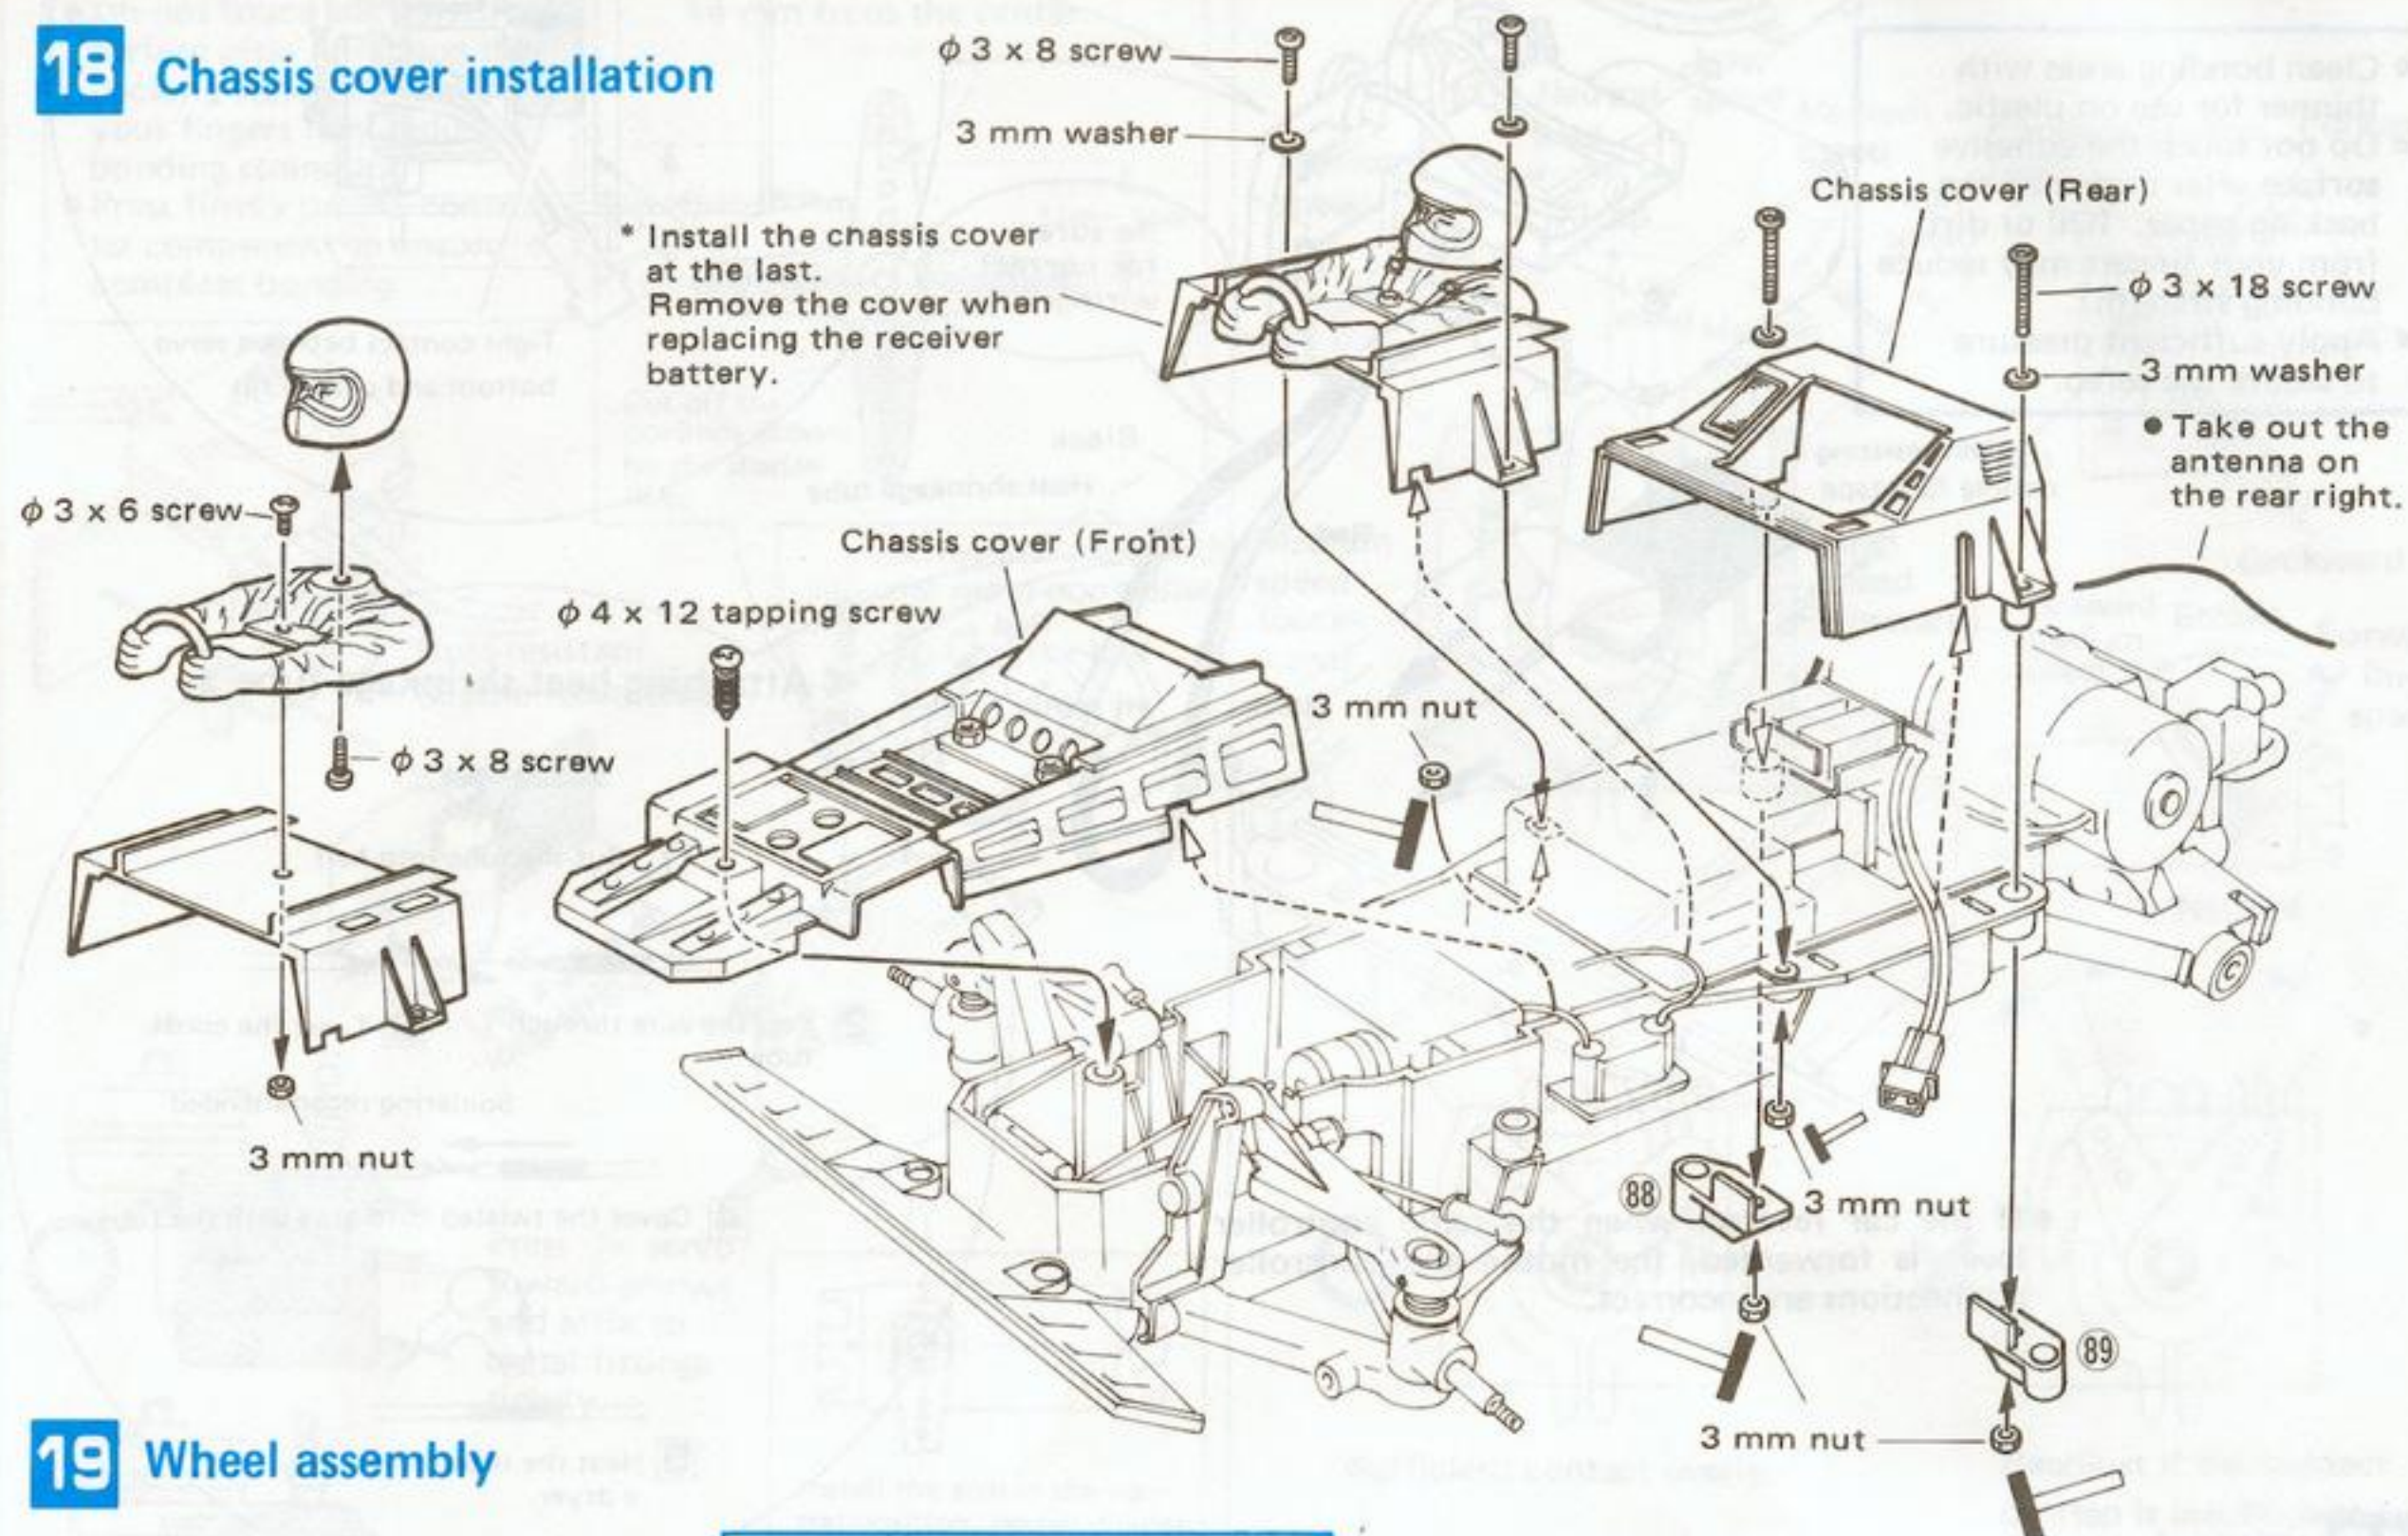

19 Wheel assembly

«Rear tires»

* Apply a sufficient amount of soap water here.

Do not apply soap water here. (Wheel will be slippery if applied.)

Expand the tire edge.

• The tire is tight when inserting rim 23 since abrasion resistance, high tensile strength rubber is used.

If wheel 23 is temporarily inserted in the tire, complete the job by rotating it toward the arrow.

Partically nylon 4 mm locknut (Tighten with the wrench included in the kit.)

Match projections to large holes.

Match projections to these large holes.

Projection

Projection

«Front tires»

$\phi 2 \times 11$ tapping screw (8 pcs)


$\phi 2 \times 15$ screw (8 pcs)

Rear shaft

22 Ni-Cd battery placement

«Before connecting the connector»
(For 6 V battery, the following is not required.)

* Two types of battery connectors are provided as illustrated below. Confirm your connector type before connection.

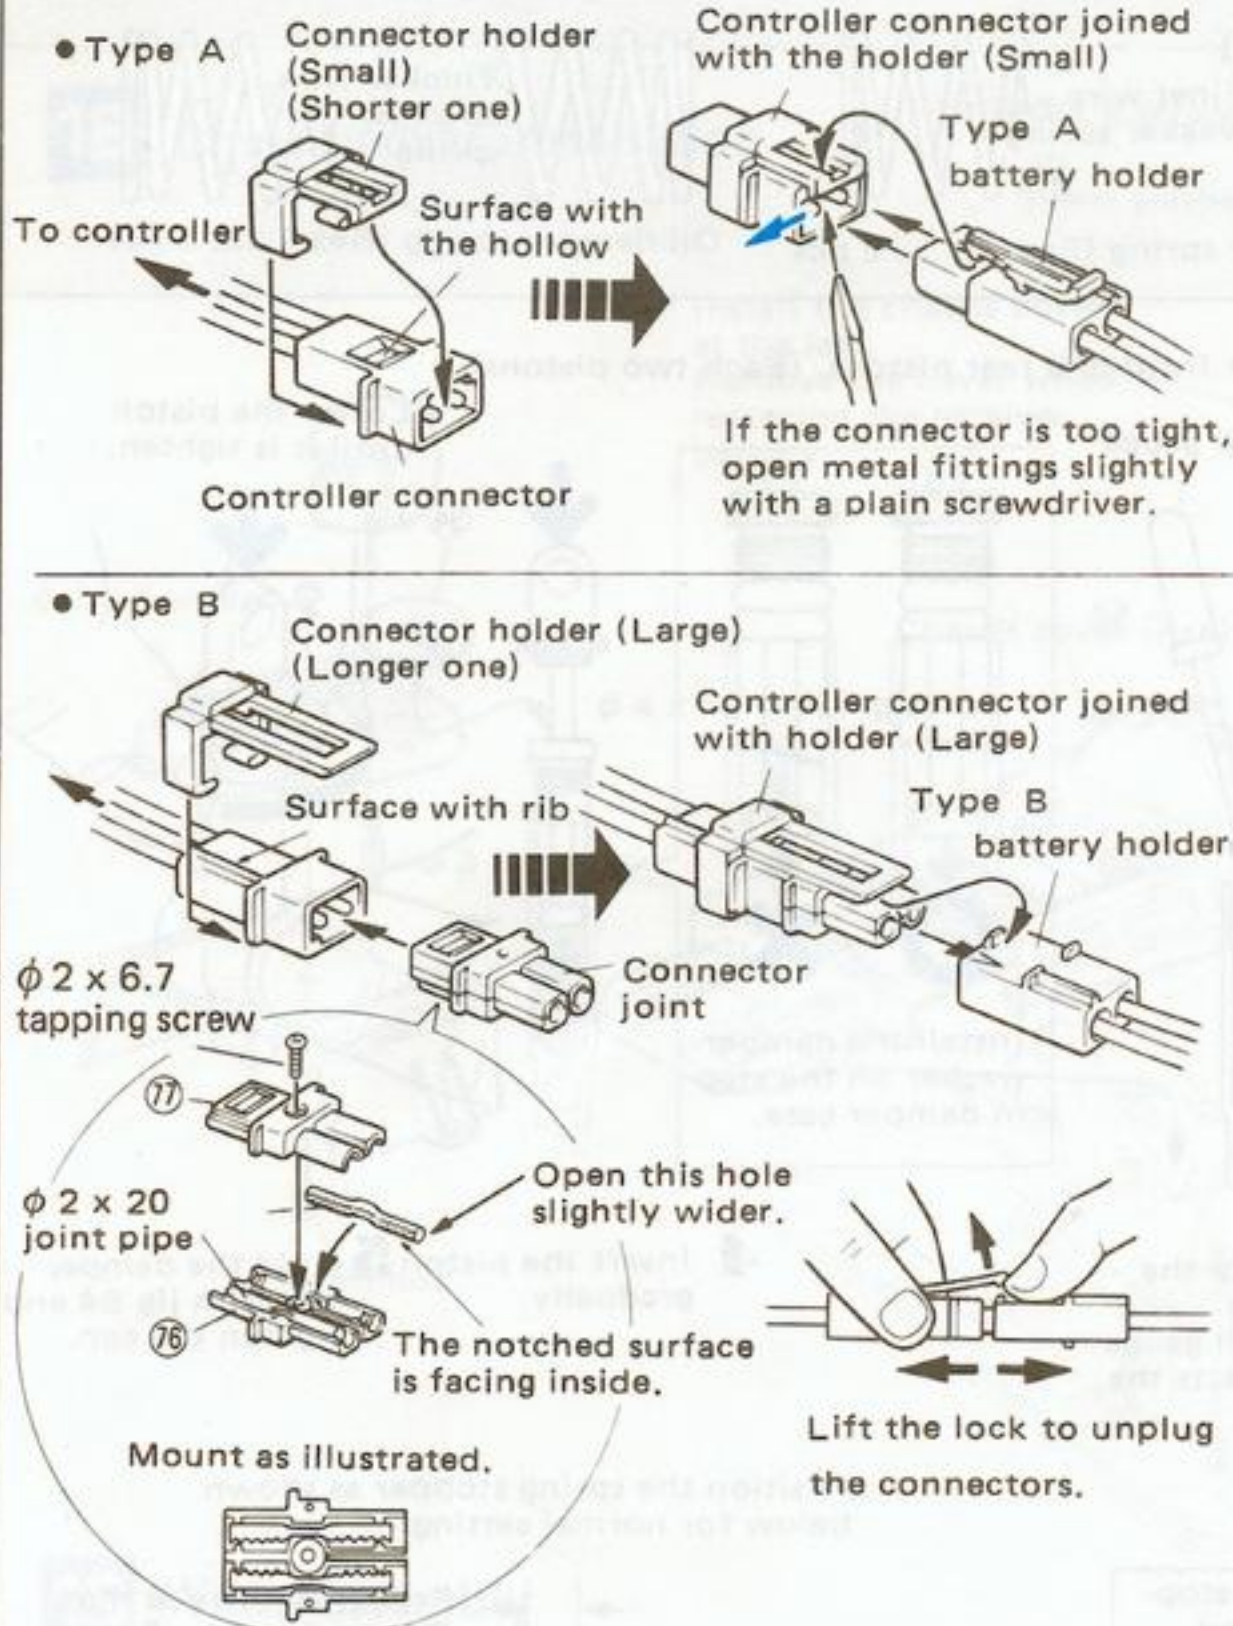

«Metallic part actual sizes used on P. 12»


$\phi 5 \times 6$ butt screw 2 pcs

Partially nylon 4 mm locknut 2 pcs

$\phi 2 \times 20$ joint pipe 2 pcs


$\phi 2 \times 6.7$ tapping screw 1 pc

«Ni-Cd battery placement»

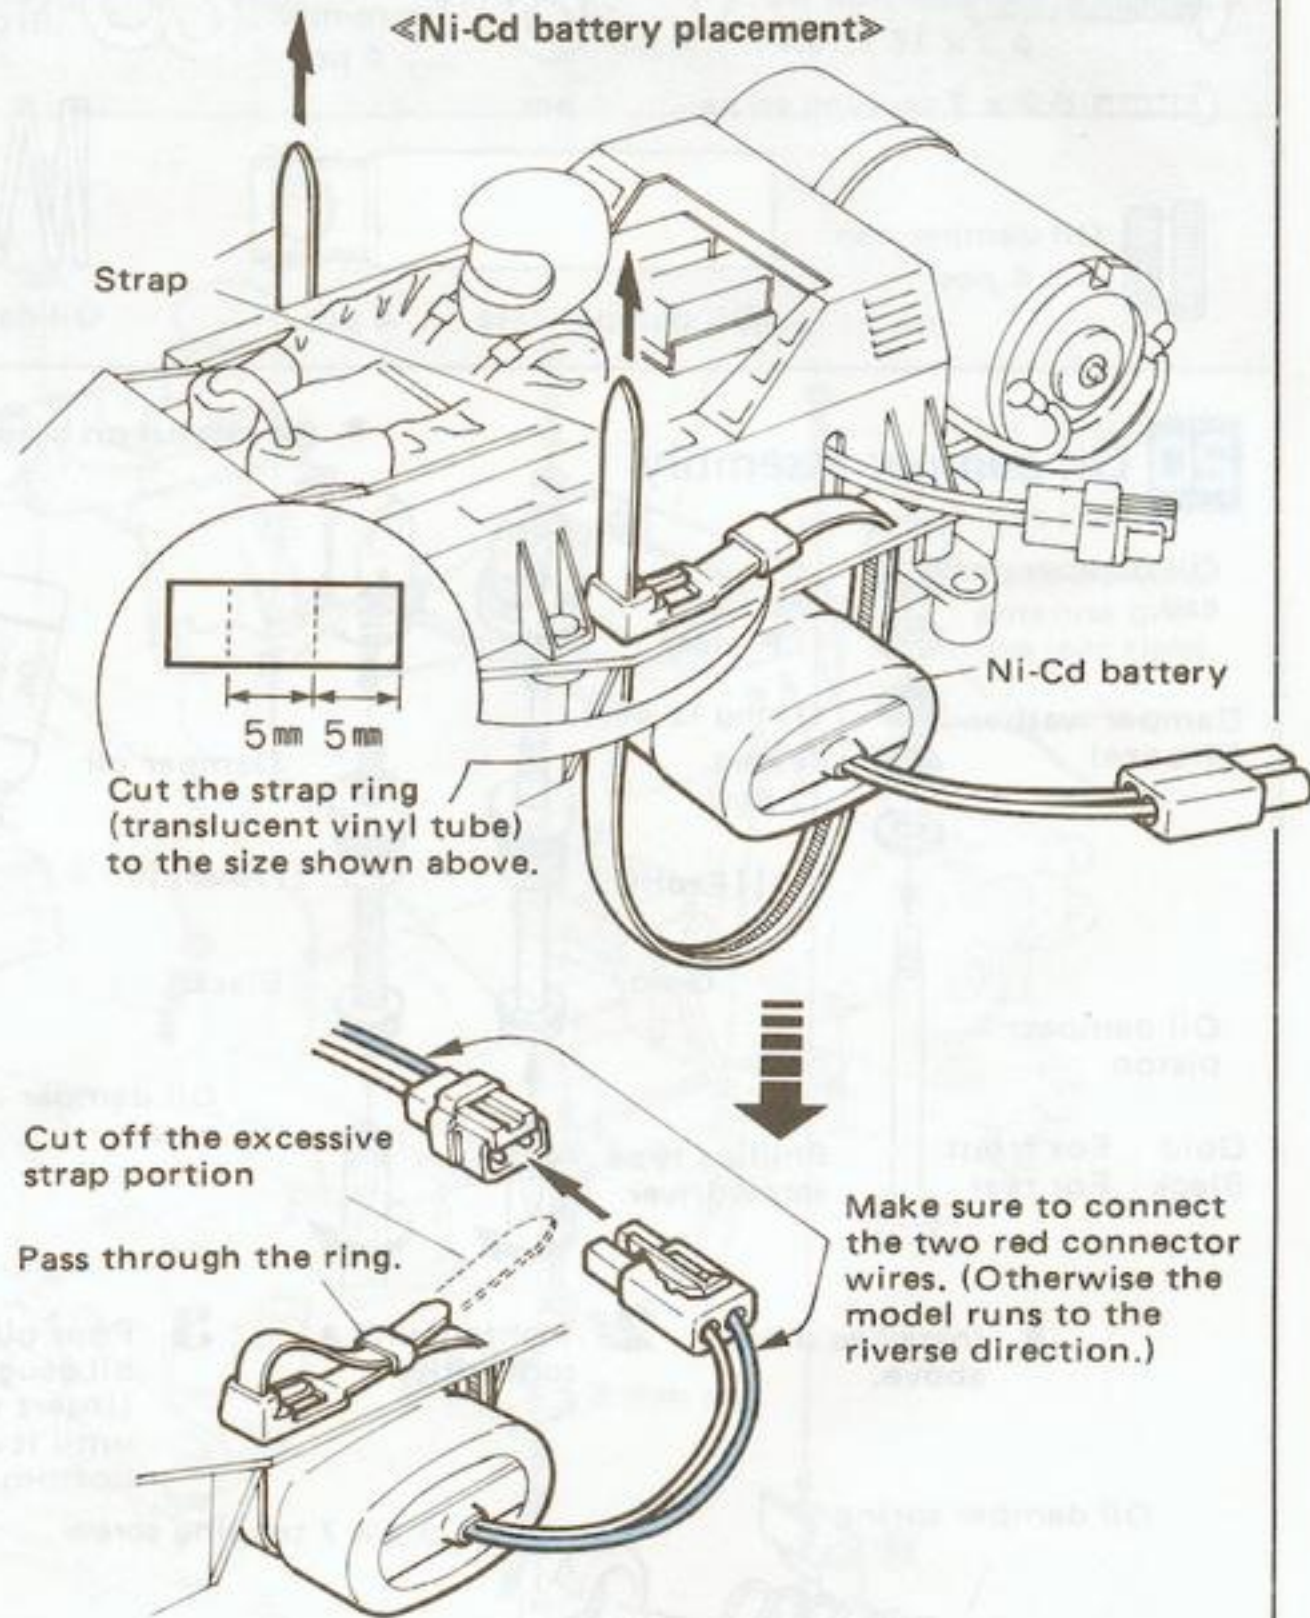

* Set the switch arm at the neutral position when plugging the connectors. (see switch position on P. 8)
Plugging connectors without switching OFF may result in damaged controller battery or motor.

23 Wheel installation

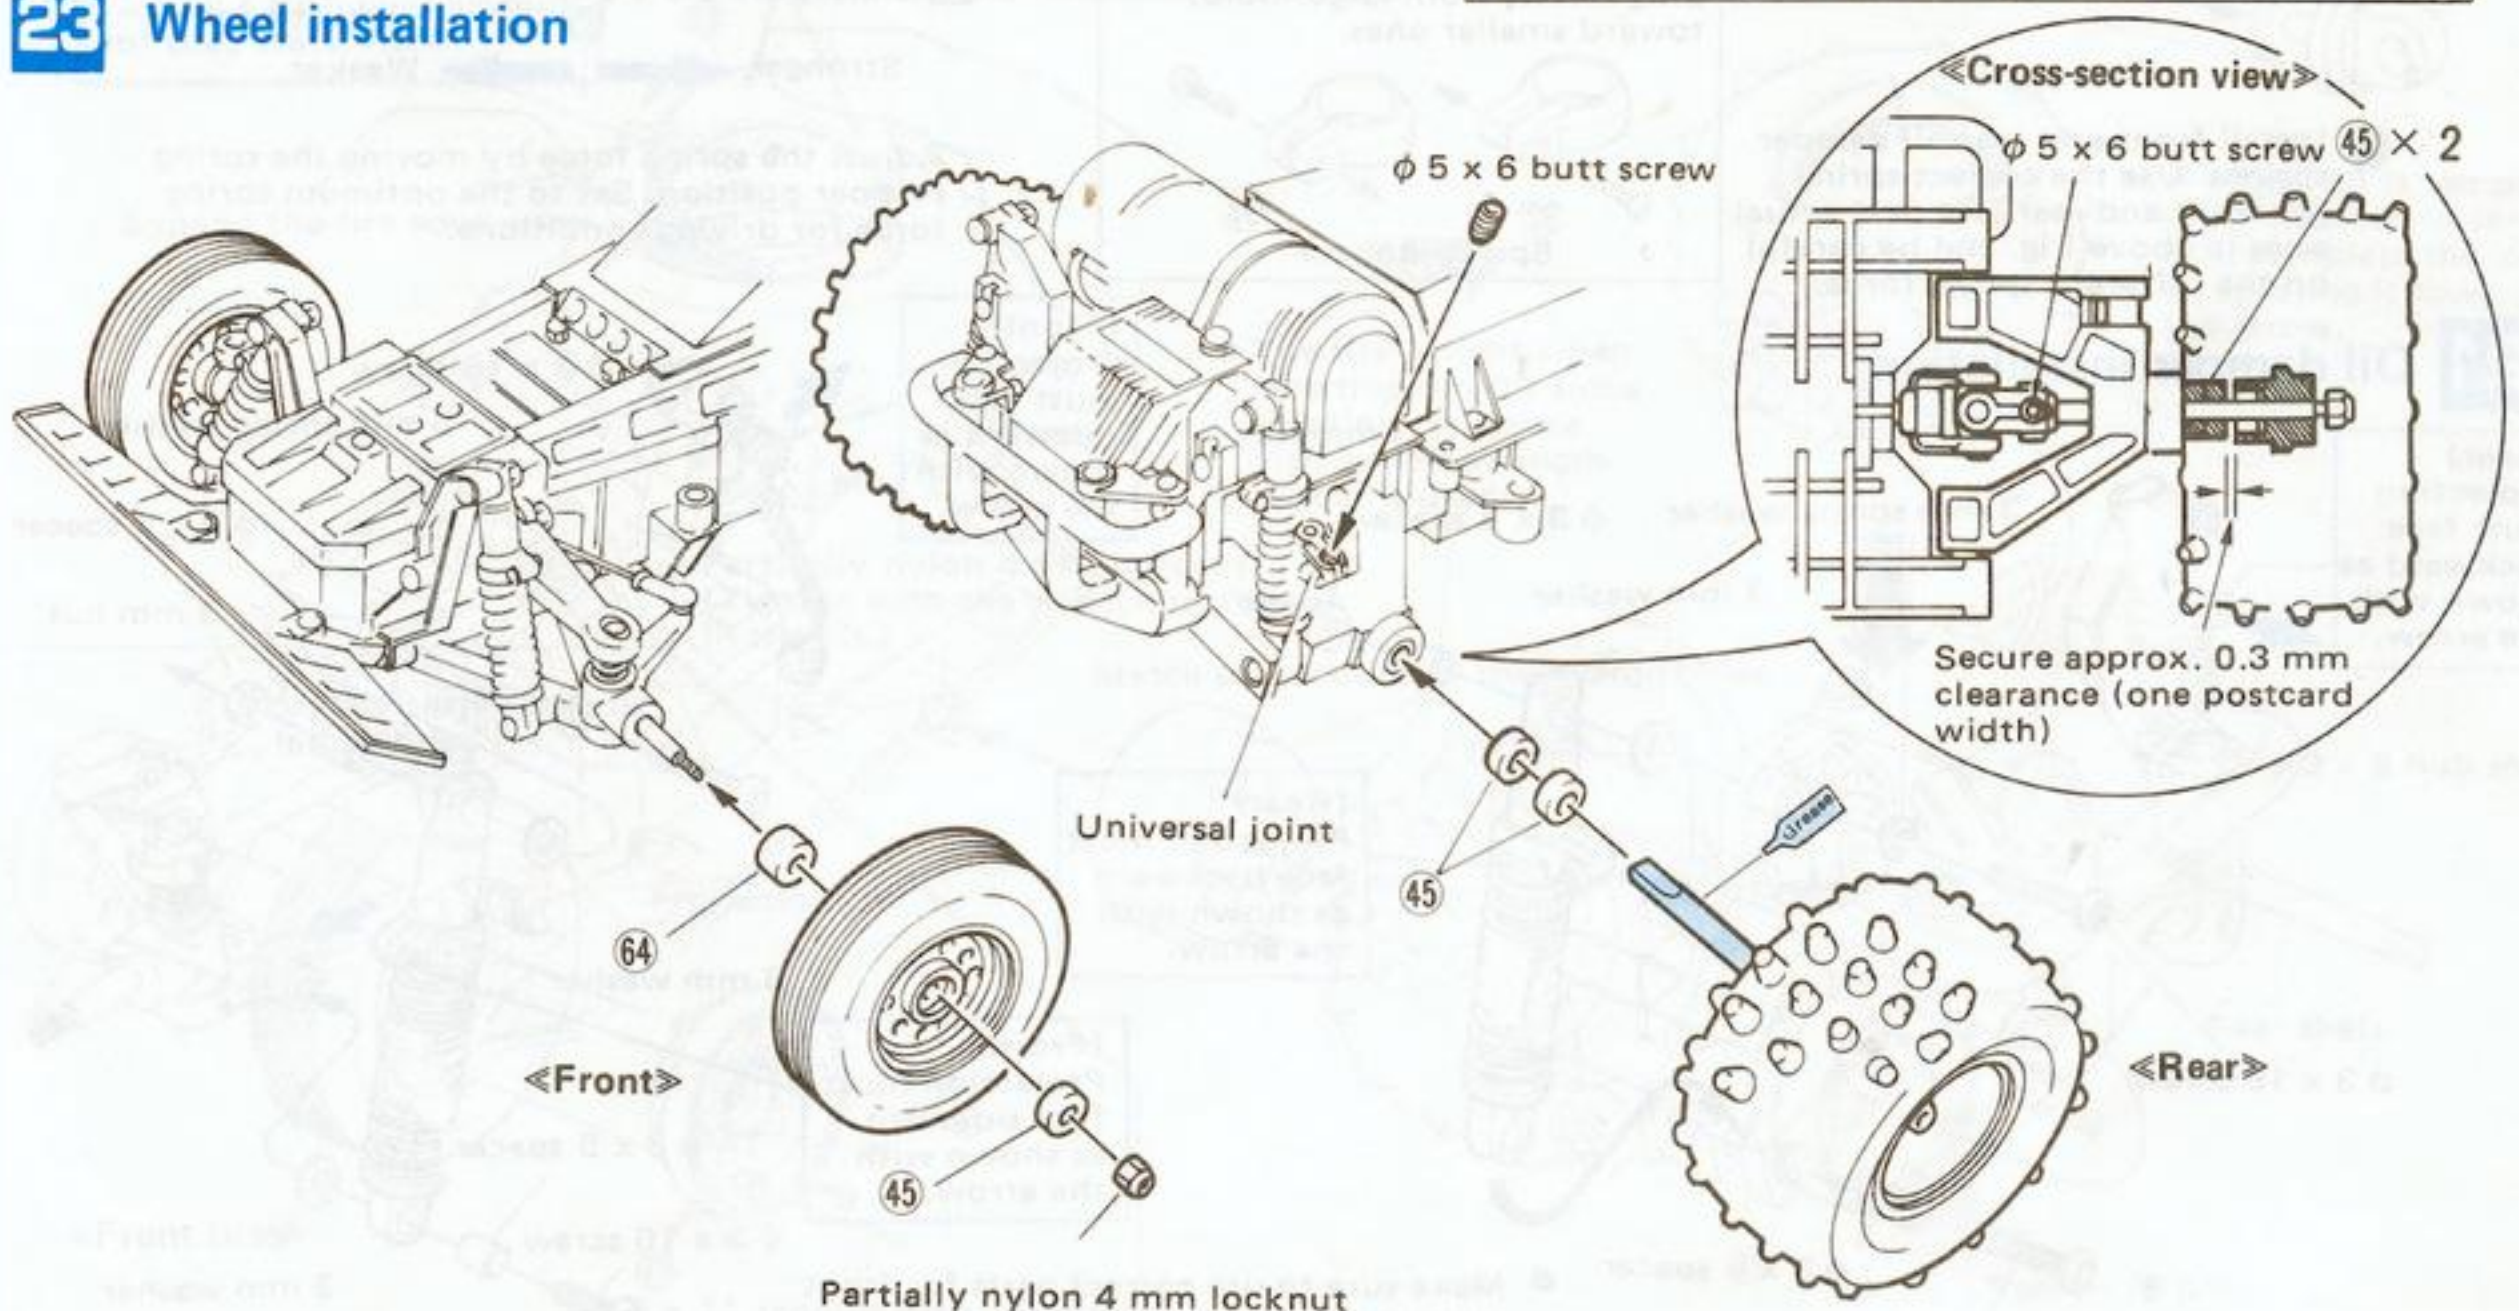

24 Wing and player's number plate installation

«Metallic part actual sizes used on P. 13»

 $\phi 3 \times 10$ tapping screw
..... 10 pcs

 3 mm washer 2 pcs

«Wing»

Drill a $\phi 3.2$ hole with a gimlet or drill.

Remove the grey area with a cutter or scissors.

«Wing cross-section view»

Paint for polycarbonate

- Clean dirt and oil with soapy water before painting.
- Coat the body interior with paint for polycarbonate or laquer for metal.

(Always paint from the reverse side.)

25 Pipe frame (roll bar) installation

«Mounting the antenna pipe»

$\phi 3 \times 10$ tapping screw

3 mm washer

Tie this portion so that wire does not fall.

About 5 cm long

Antenna pipe

Bond decals (see the picture on package as an example.)

Press antenna pipe into this chassis hole after passing the wire through the pipe.


Pass the wire through the bottom. The wire is stretched so that it will not be tangle with the tire.

$\phi 3 \times 10$ tapping screw
(all screws securing pipe frames are the same.)

Pipe frame

Handling precaution

The R/C BUGGY is designed as a high-speed off-road racing car. Be careful while handling and operating this model.

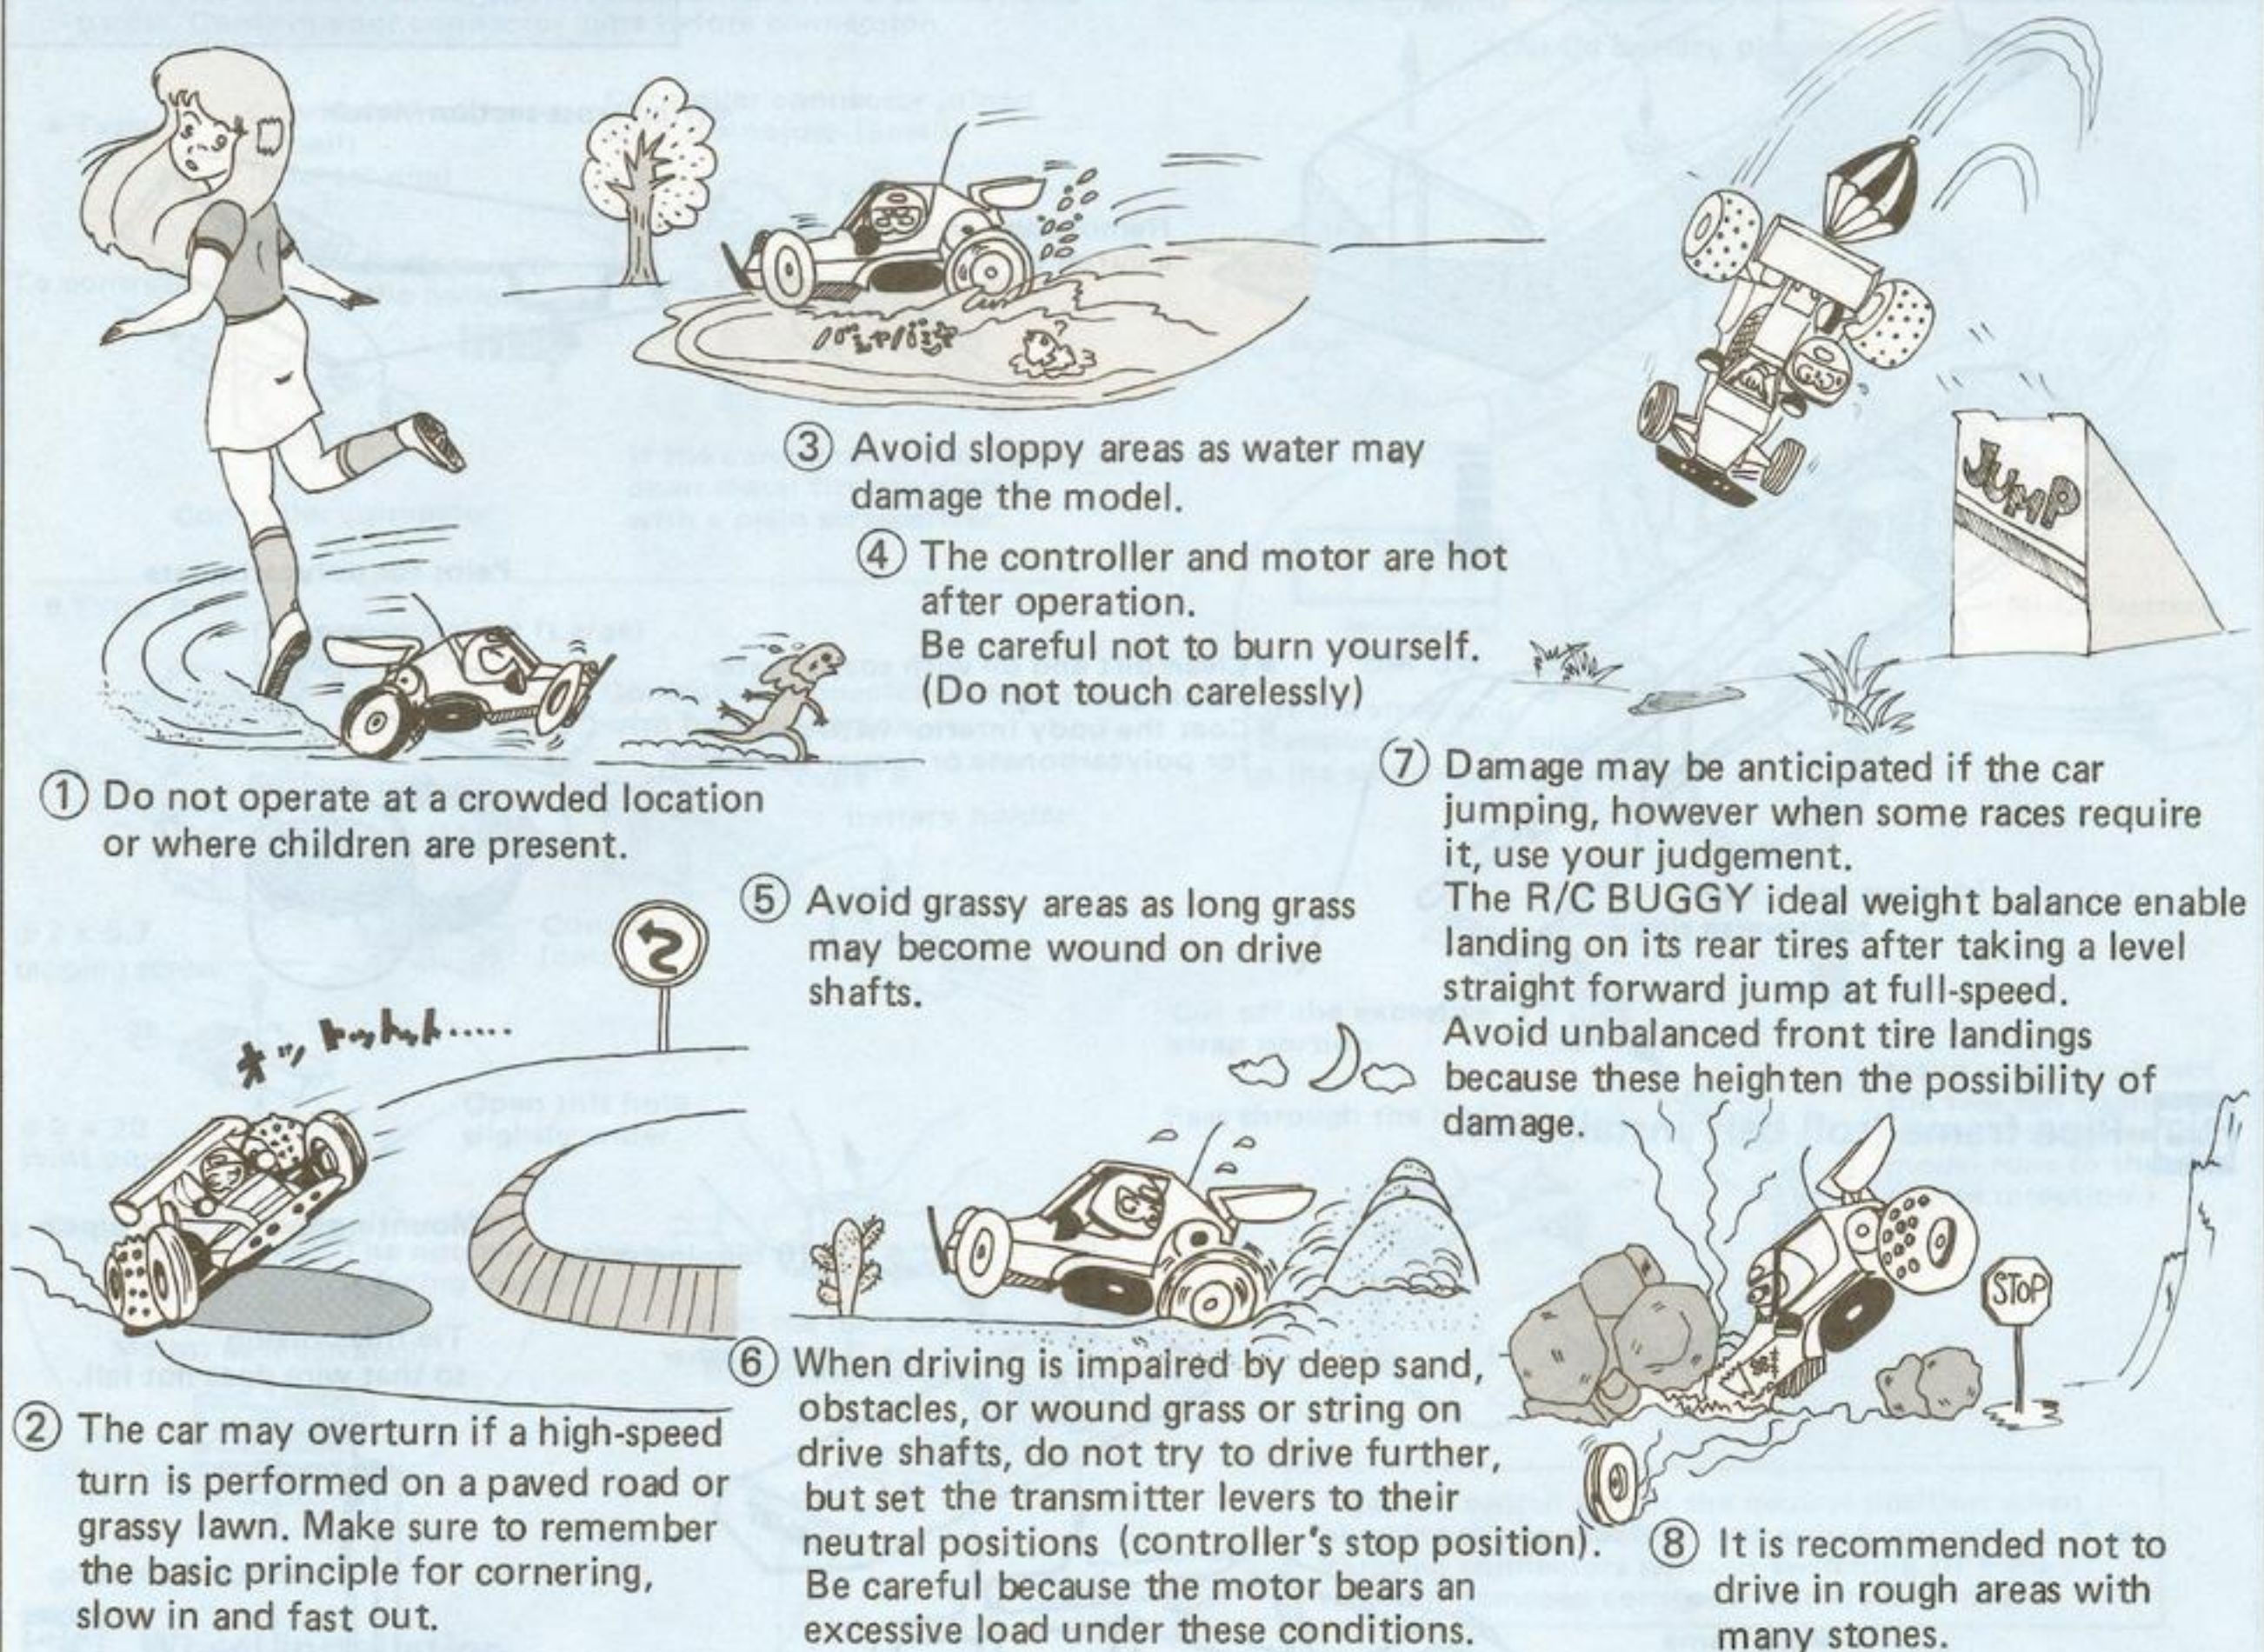

① Do not operate at a crowded location or where children are present.

③ Avoid sloppy areas as water may damage the model.

④ The controller and motor are hot after operation. Be careful not to burn yourself. (Do not touch carelessly)

⑤ Avoid grassy areas as long grass may become wound on drive shafts.

⑦ Damage may be anticipated if the car jumping, however when some races require it, use your judgement. The R/C BUGGY ideal weight balance enable landing on its rear tires after taking a level straight forward jump at full-speed. Avoid unbalanced front tire landings because these heighten the possibility of damage.

② The car may overturn if a high-speed turn is performed on a paved road or grassy lawn. Make sure to remember the basic principle for cornering, slow in and fast out.

⑥ When driving is impaired by deep sand, obstacles, or wound grass or string on drive shafts, do not try to drive further, but set the transmitter levers to their neutral positions (controller's stop position). Be careful because the motor bears an excessive load under these conditions.

⑧ It is recommended not to drive in rough areas with many stones.

Checks before driving

① Check all screws and nuts for tightness. Pay special attention to screws and nuts securing the suspension, and butt screws attached to the universal joint.

② Check gears for correct engagement. Faulty pinion gear engagement due to loosened motor securing screws may cause idler gear damage. Check the pinion gear butt screw for correct tightness. (See Page 6.)

③ Are proportional controller batteries supplying sufficient power? Receiver battery life is shorter than that of the transmitter, and early battery replacement is recommended. (See Page 2.)

④ Does the controller operate correctly? Make sure that the controller is correctly adjusted. (See Page 8.)

⑤ Does the steering operate correctly? Perform a test run to see if the car runs straight. If not, turn the steering lever trim toward the reverse direction of the car's drift. If still not corrected, adjust the steering rod length as instructed in the assembly sheet. (See Fig. 14 of page 7.)

⑥ Are all wire connections tight? Faulty insulating vinyl or soldered areas may cause short circuit. Repair using vinyl insulating tape. (See Fig. 18 of Page 9.)

⑦ Are drive batteries sufficiently charged? (See Page 2.)

② Irregular motor or gear sound. Rear wheels do not rotate smoothly. See Page 5, 6, and 12.

③ The car does not respond properly to control or runs at random during driving. See Page 2, 7, and 8.

④ Speed controller does not operate correctly including no full-speed drive. See Page 8.

⑤ Faulty straight driving, or turning to the right and left differs. See Fig. 14 to of Page 7.

⑥ Controller, drive batteries, or wires are over-heated. See Page 8.

⑦ For faulty proportional controller operation including improper servo movement, check the following points: Sufficient power supply by batteries, correct (+) and (-) battery connections, an discontinuous servo or connector wires.

⑧ If the faulty operation is still not correct after the above, contact your dealer for repair.


Troubleshooting

• Following troubles may be corrected through performance of above described checks before operation.


① The car does not move forward although the motor is operating. See Page 5, 6, 8, and 12.

PART LIST

ABS Parts ① x 1 Parts ①, ②, ③, ⑥, and ⑨ are not used.

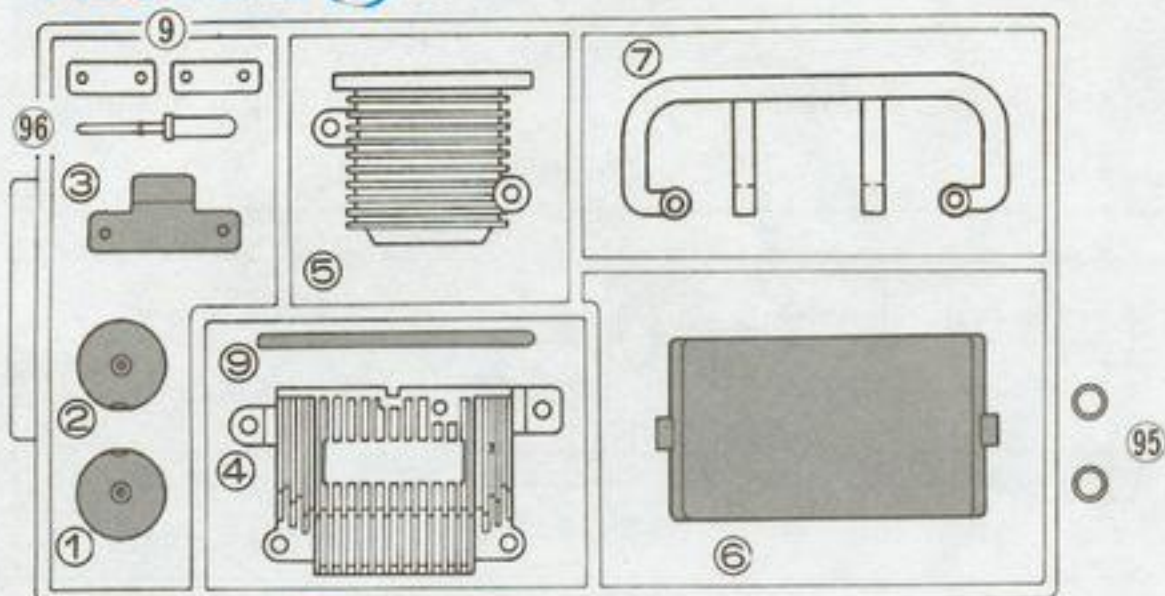


ABS Parts ② x 1

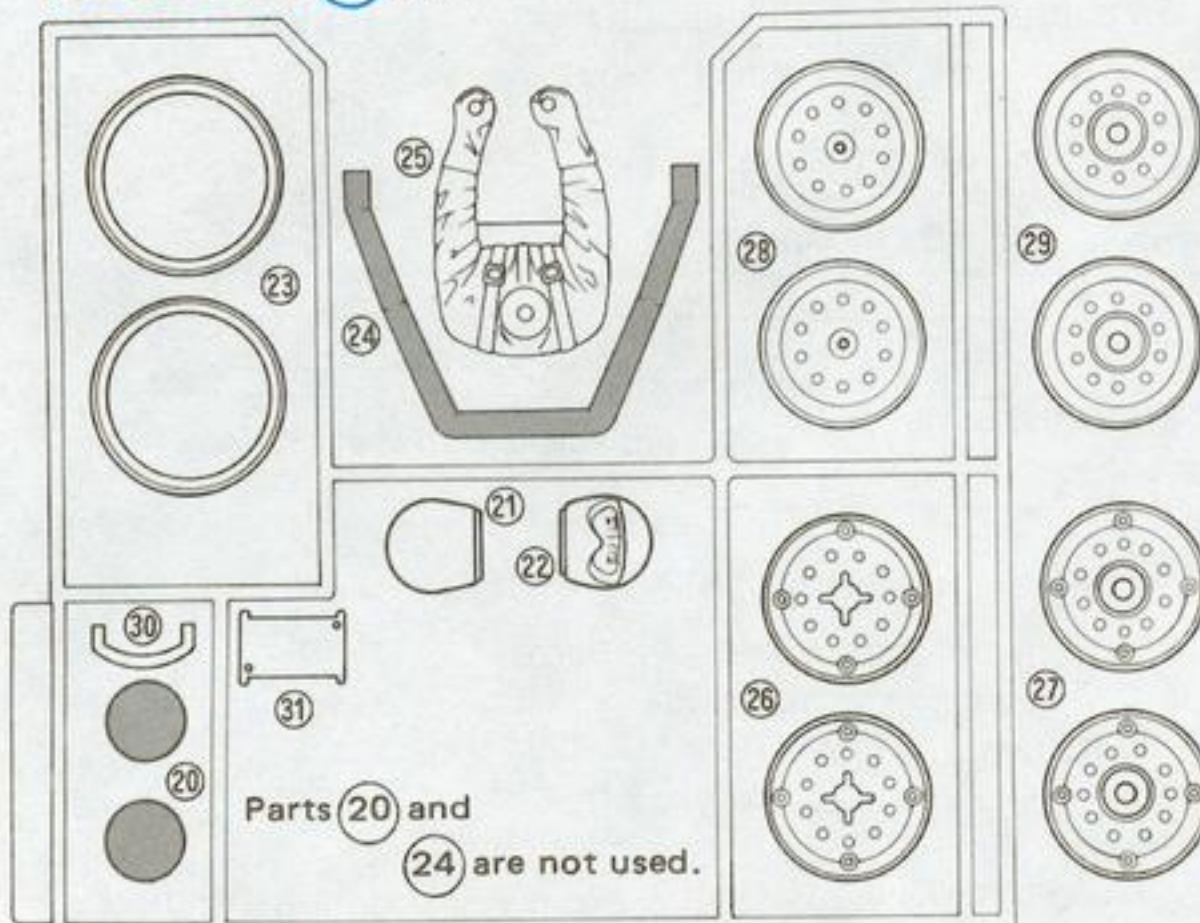


Parts ②① and ②④ are not used.

Reinforced nylon parts ① x 1

Parts ④③, ⑤③, ⑤⑤, ⑤⑧, and ⑥② are not used.

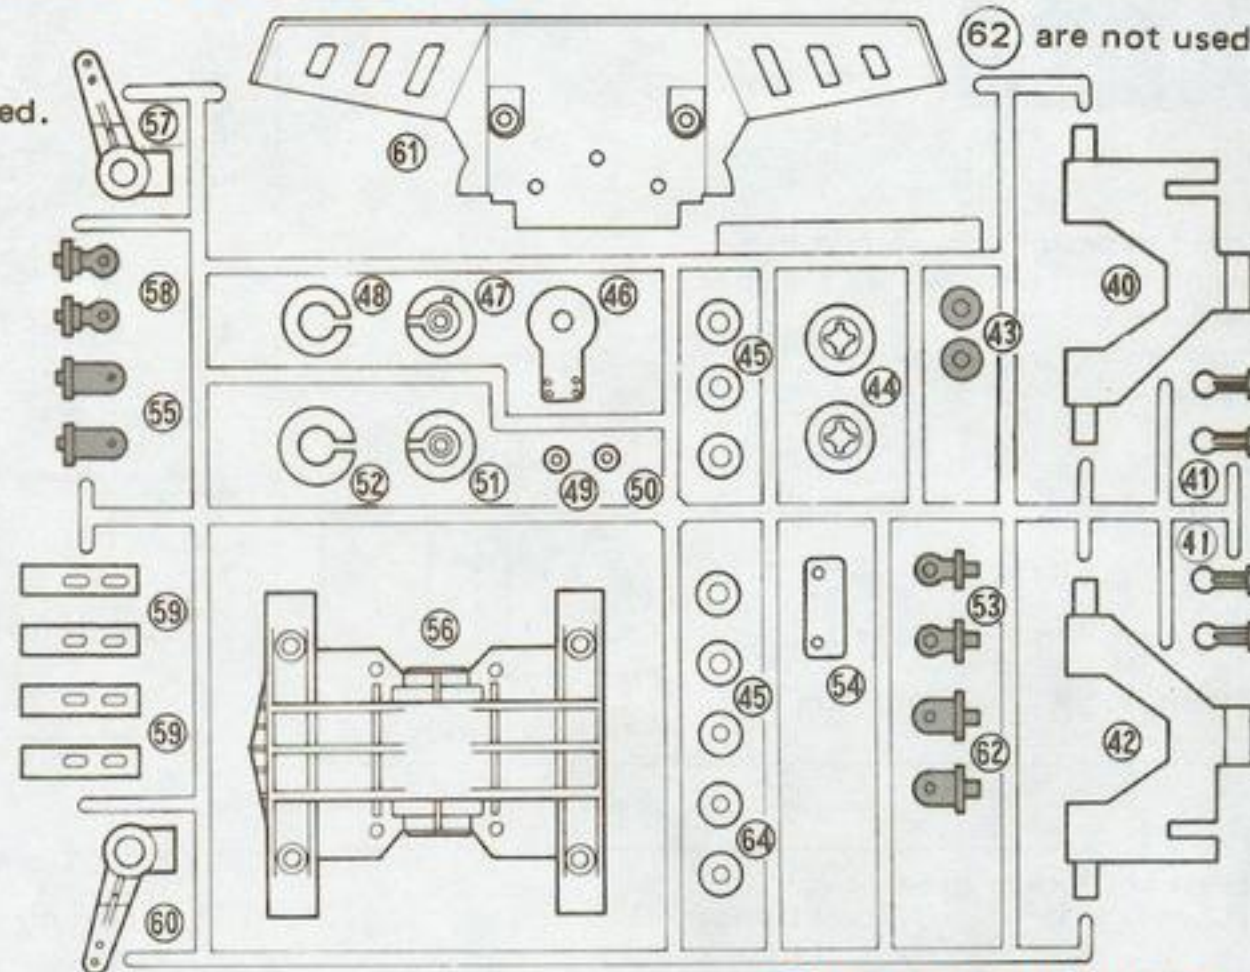

Reinforced nylon parts ③ x 1

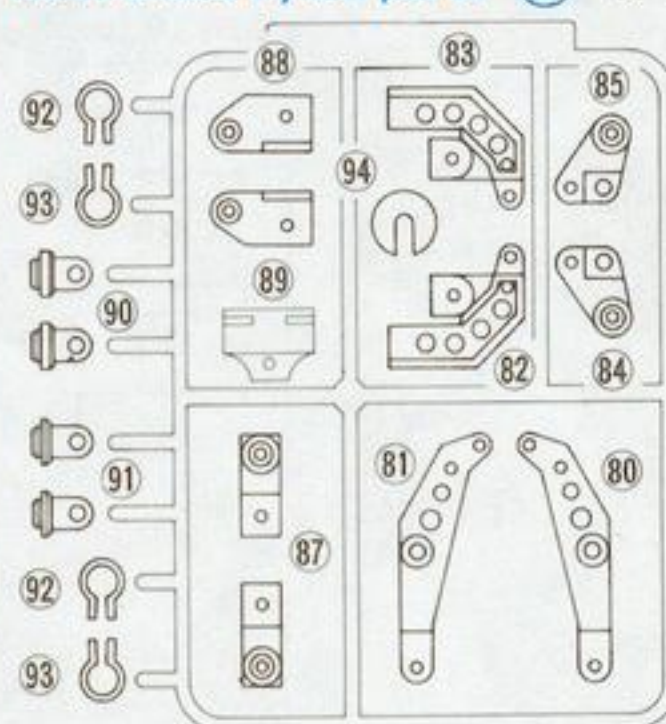


Front suspension set


Upper arm x 2




Lower arm (Left 1, Right 1)

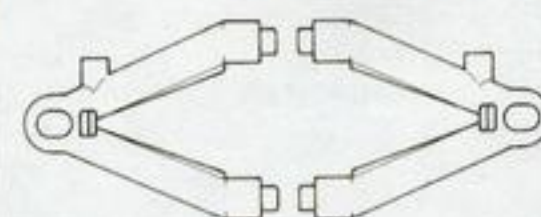

Front suspension mount x 1



Under guard x 1

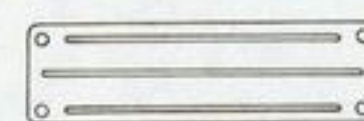


King pin (Nylon) x 2




Damper set

Oil damper sprint (Front) x 2

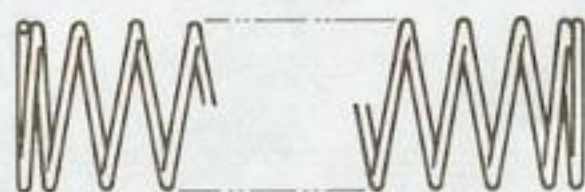

Oil damper spring (Rear) x 2

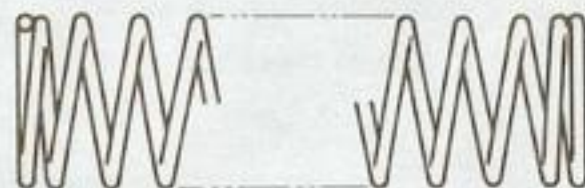


Oil damper cap x 4

Damper oil x 1




Damper case x 4

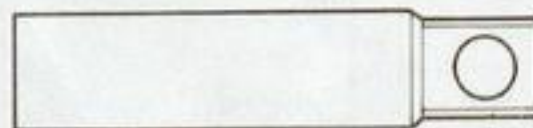

When a spare part set is required, the following parts are included:

- ★ Oil damper piston (Front x 2, Rear x 2)
- ★ Damper washer x 8
- ★ O-ring x 8


Gear set

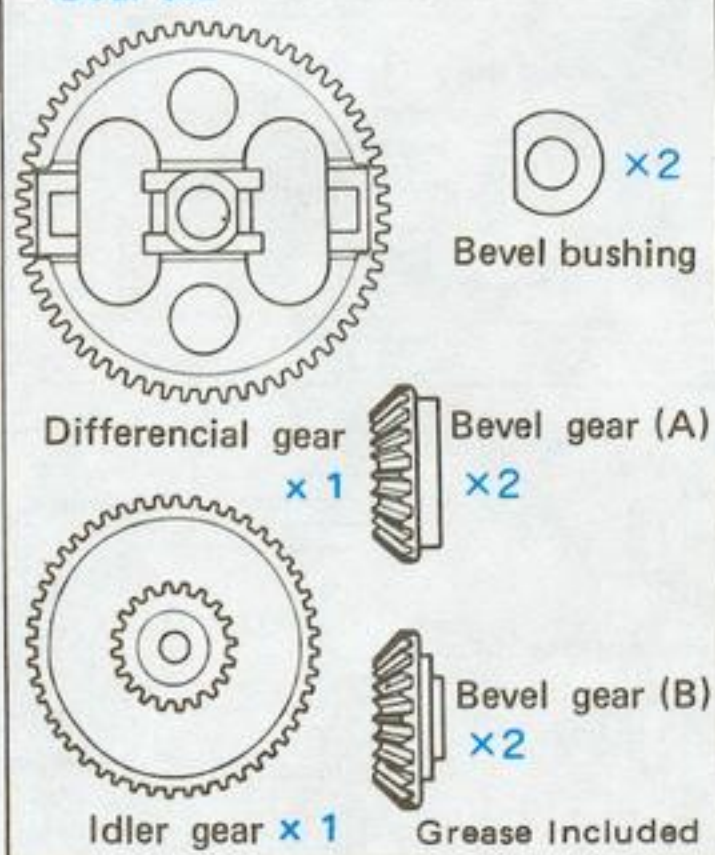


Pinion gear set



Controller

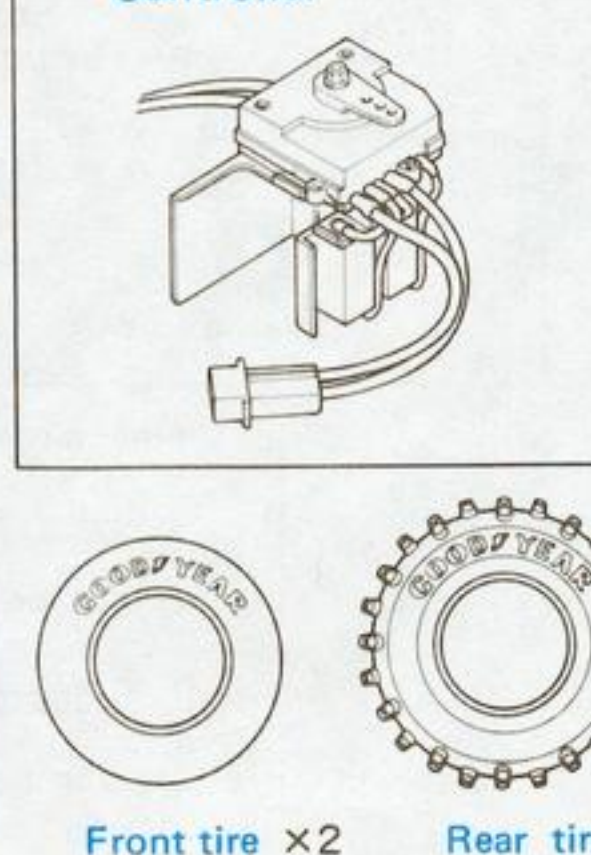


Motor mount x 1




With sponge cushion

Universal joint x 2




MABUCHI RS-540 Motor x 1

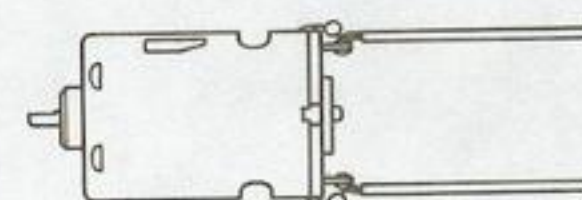


PART LIST

• Some types of screws and nuts are included excessively for spare part use.
 ("φ3" in figures represents "3 mm diameter")


Nut set

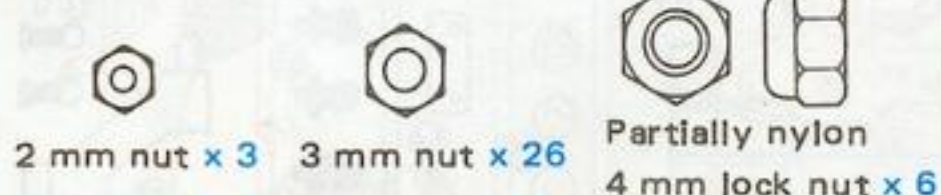

C Set

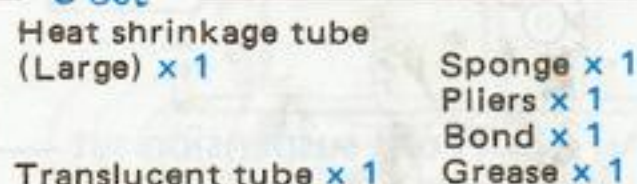


Other Parts

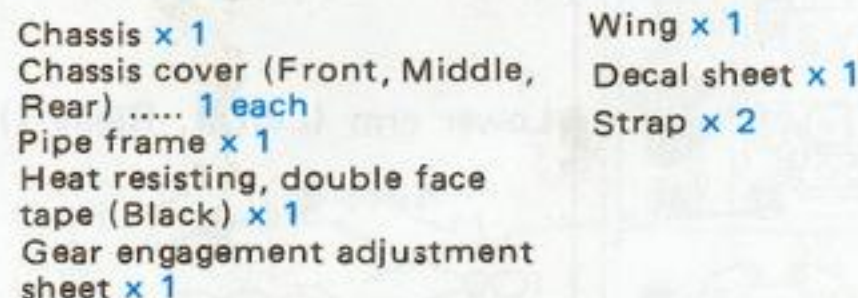


* Spare parts may be purchased separately.


Washer set

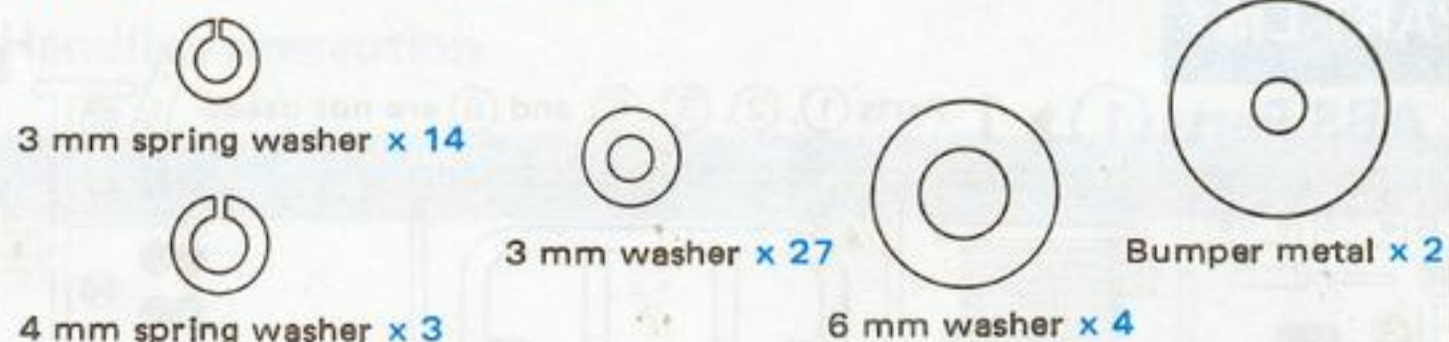


Screw set

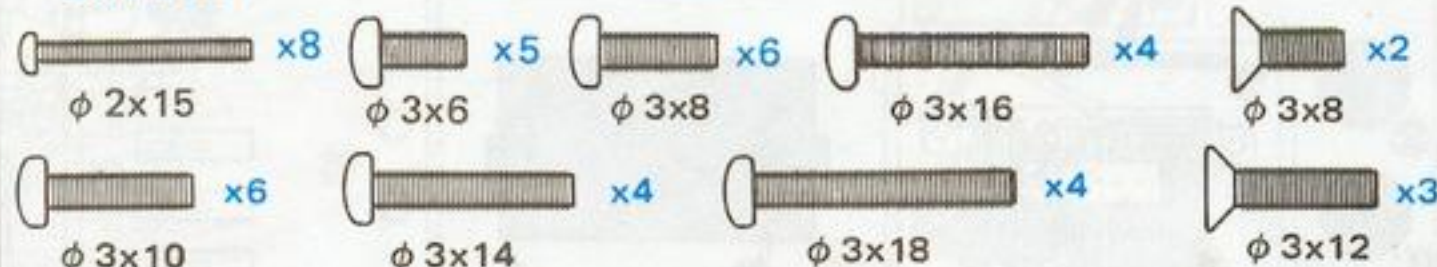

Tapping screw set

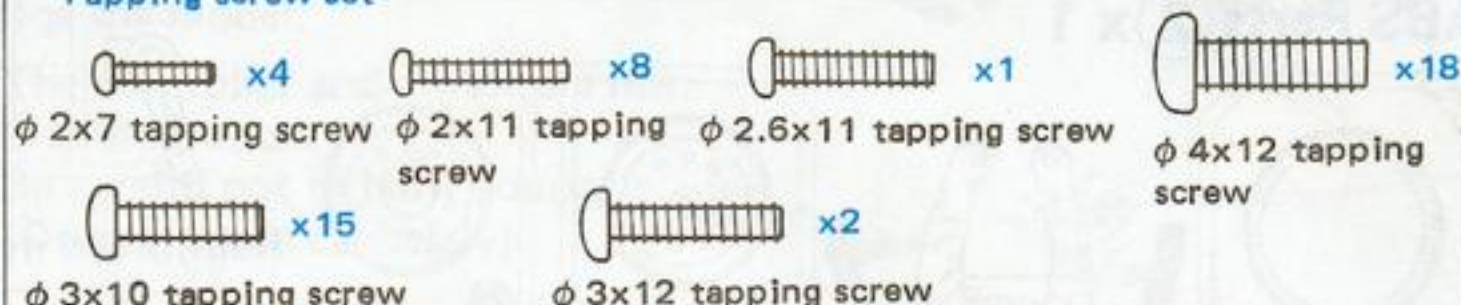


Shaft set

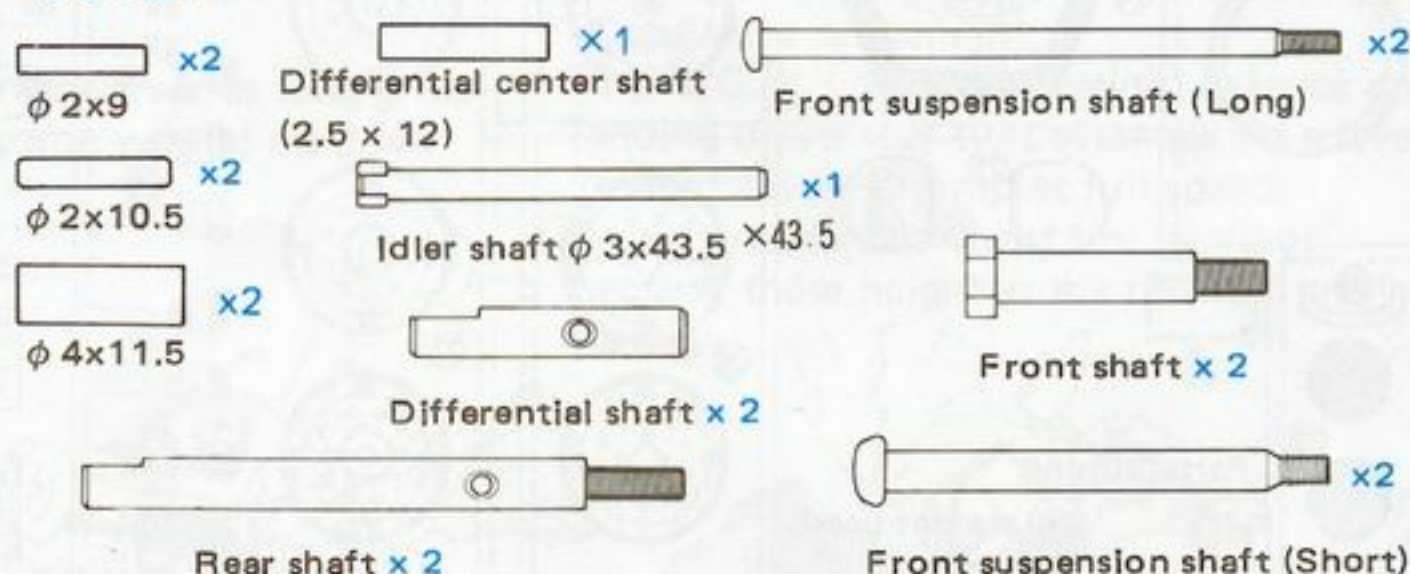

A set



B set

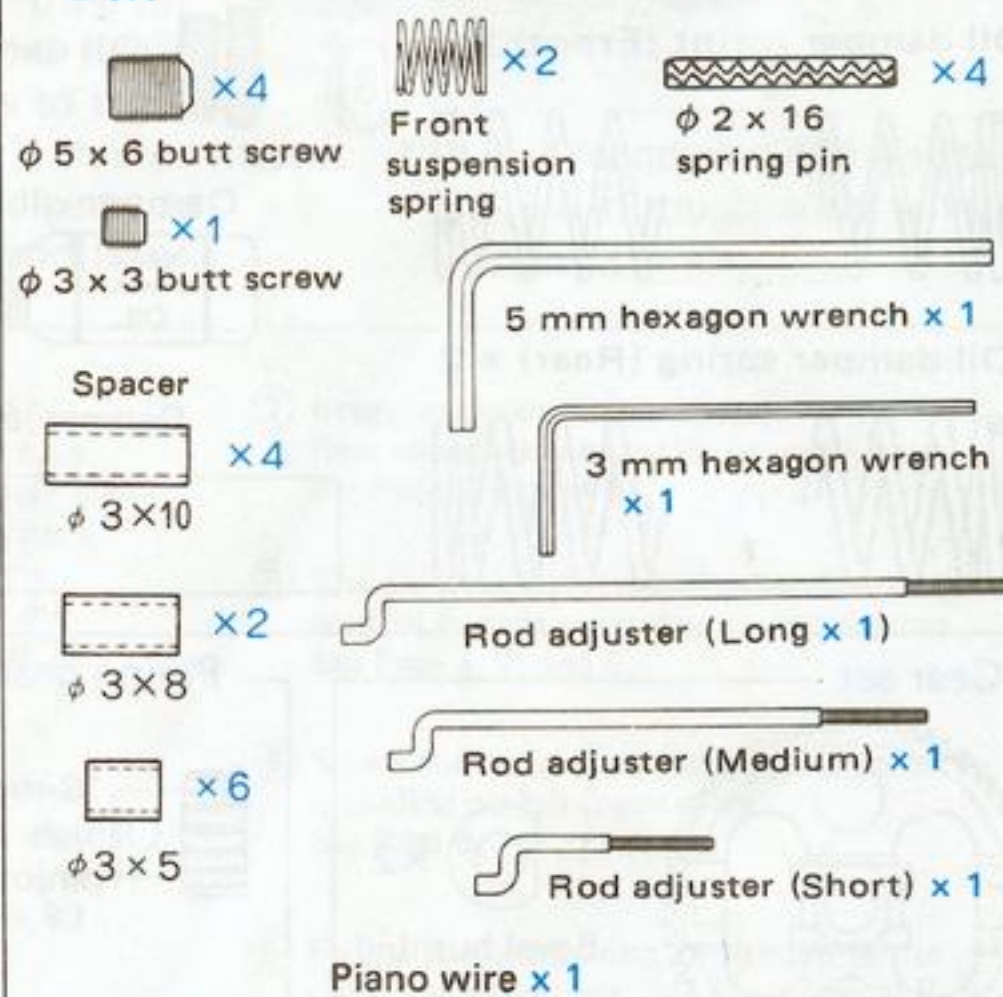

Connector set

